




aerospace
climate control
electromechanical
filtration
fluid & gas handling
hydraulics
pneumatics
process control
sealing & shielding

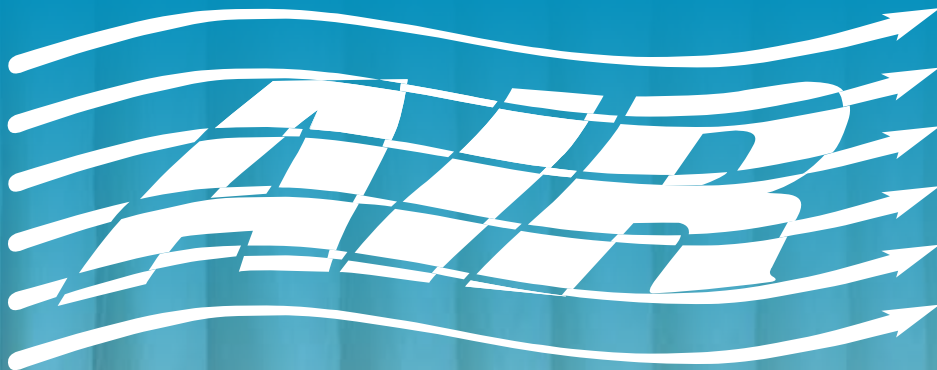

WARNING: The products described in this catalog can expose you to chemicals including Diisononyl phthalate, Carbon black, which are known to the State of California to cause cancer. For more information go to www.P65Warnings.ca.gov.

Air Filtration

Products and Custom Solutions



ENGINEERING YOUR SUCCESS.

Table of Contents

| | |
|--------------------------------------|-------|
| ECO® Series..... | 3-11 |
| ECO Vent..... | 12 |
| Ember Separator..... | 13 |
| Pamic Series..... | 14-17 |
| Dynacell® Series..... | 18-20 |
| AFSF Series..... | 21 |
| AFCS Series..... | 22 |
| AFAP Series..... | 23 |
| AFHP Series..... | 24 |
| AFUP Series..... | 25 |
| Spinaire Series..... | 26 |
| EACP Series..... | 27 |
| EA Series Replacement Filters..... | 28 |
| EAVLR Series..... | 29-30 |
| EAF Series..... | 31-32 |
| Air Inlet Fittings and Clamps..... | 33 |
| Filter Service Indicator..... | 33 |
| Marine Air Filter/Silencers..... | 34 |
| Air Filter Replacements..... | 35 |
| Air Filter Cleaning Kit..... | 35 |
| ECO-TL Series..... | 36-37 |
| Filtration Products and Systems..... | 38-39 |



The ECO-SE is designed for small engine applications. It also has two unique features. First, it has a urethane outlet tube which allows the filter to be mounted directly to a metal tube or turbo without an additional rubber connection. Second, the standard unit is a straight-through air filter, air goes in one end and out the other. Intake adapters are available if you would like to remotely locate the intake. The side inlet version offers additional mounting flexibility.


ECO-SE (Small Engine Applications)



Durable urethane beaded outlet eliminates additional rubber connections.

Easy to service, compact, lightweight, and efficient design. For light and medium duty applications (smaller mobile and stationary engines up to 300 hp).

Straight-through design improves pressure differential in smaller engine air intakes with drain holes for water removal.

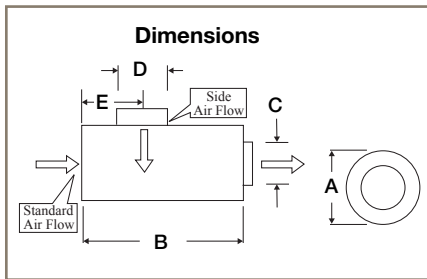


Specifications

| Part No. | Dimensions | | | | | | | | | | Air Flow | | Weight | |
|-------------------------|-----------------|------|---------------|------|---------------|------|--------------|------|------|------|----------|-----------|--------|-----|
| | (Diameter) A | | (Length) B | | (Outlet) C | | (Inlet) D | | E | | cfm | m³/min | lbs | kg |
| | in. | cm | in. | cm | in. | cm | in. | cm | in. | cm | | | | |
| ECO-SE Straight-Through | | | | | | | | | | | | | | |
| 114500001 | 6.8 | 17.3 | 14.2 | 36.1 | 3.0 | 7.6 | - | - | - | - | 240-340 | 6.8-9.6 | 5.0 | 2.3 |
| 114500002 | 7.8 | 19.8 | 17.2 | 43.7 | 4.0 | 10.2 | - | - | - | - | 355-510 | 10.1-14.4 | 6.5 | 2.9 |
| 114500003 | 9.7 | 24.6 | 18.9 | 48.0 | 5.0 | 12.7 | - | - | - | - | 610-890 | 17.3-25.2 | 7.9 | 3.6 |
| 117122000 | 11.0 | 27.9 | 24.0 | 61.0 | 7.0 | 17.8 | - | - | - | - | 780-1180 | 22.1-33.4 | 12.9 | 5.9 |
| ECO-SE Side Inlet | | | | | | | | | | | | | | |
| 114880003 | 9.7 | 24.6 | 19.4 | 49.3 | 5.5 | 14.0 | 6.0 | 15.2 | 4.0 | 10.2 | 600-900 | 17.0-25.5 | 9.0 | 4.1 |
| 114880005 | 7.8 | 19.8 | 17.2 | 43.7 | 4.5 | 11.4 | 6.0 | 15.2 | 5.5 | 14.0 | 420-800 | 11.9-22.7 | 7.0 | 3.2 |
| 400292000 | 11.0 | 27.9 | 15.3 | 38.9 | 7.0 | 17.8 | 6.0 | 15.2 | 18.0 | 45.7 | 840-1050 | 23.8-29.7 | 13.0 | 5.9 |

Mounting Clamps (2 Required)

| Part No. | Dimensions | | | | | |
|-----------|------------|------|-----|------|-----|------|
| | A | | B | | C | |
| | in. | cm | in. | cm | in. | cm |
| 099049001 | 6.9 | 17.5 | 3.5 | 8.9 | 5.1 | 13.0 |
| 099049002 | 7.9 | 20.1 | 3.5 | 8.9 | 5.6 | 14.2 |
| 099049003 | 9.8 | 24.9 | 4.5 | 11.2 | 6.6 | 16.8 |

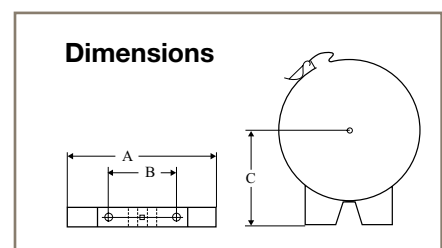

ECO Series Spin-On Disposable Air Cleaners

With its revolutionary spin-on design, the completely disposable ECO Series offers faster, safer, more trouble-free service than any other air cleaner today. Built for rugged use, it combines maximum engine protection with fuel-efficient performance and long service life.

The ECO Series provides two significant improvements in engine protection. When the filter loads with dirt and replacement is required, collected dust and debris stay safely contained inside the disposable housing, eliminating the chance of contaminating the air intake system during air filter service. Since the ECO Series uses no clean air gaskets, you never have to worry about gasket leak age. The outlet simply hooks up to the intake with a rubber connection and clamp, creating a leak-tight seal.

ECO II

Paper pleats are permanently locked in place for reliable performance.



Beaded outlet.

The first cone-type filter that is both tapered and offset.

Water-resistant media provides three-to five-times longer filter life than conventional designs.


More usable media area than conventional filters.

Media meets and exceeds all engine manufacturer performance requirements per the ISO-5011 Test Standard, with no seals or gaskets to replace

Requires no additional room to service filter.

Air flow distribution and dust loading are uniform throughout the high-performance filter cone pack, resulting in increased capacity and lower pressure differential for improved horsepower and fuel economy.

Dimensions

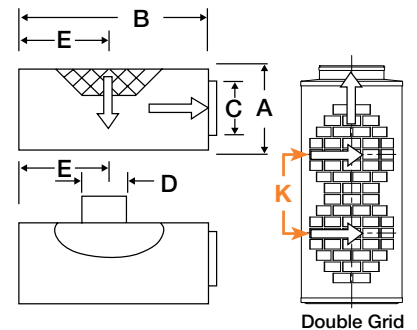

Specifications

| Part No. | Dimensions | | | | | | | | | | Air Flow | | Weight | |
|-----------|--------------|------|------------|------|------------|------|------------|------|------|------|-----------|----------------------|--------|------|
| | (Diameter) A | | (Length) B | | (Outlet) C | | (inlet)* D | | E | | cfm* | m ³ /min* | lbs* | kg* |
| | in. | cm | in. | cm | in. | cm | in. | cm | in. | cm | | | | |
| 071338001 | 10.0 | 25.4 | 24.0 | 61.0 | 6.0 | 15.2 | 6.0 | 15.2 | 9.0 | 22.9 | 820-1220 | 23.2-34.5 | 15.5 | 7.1 |
| 071338002 | 11.0 | 27.9 | 24.0 | 61.0 | 7.0 | 17.8 | 7.0 | 17.8 | 9.0 | 22.9 | 1200-1700 | 34.0-48.1 | 19.2 | 8.8 |
| 071338003 | 13.5 | 34.3 | 24.0 | 61.0 | 7.0 | 17.8 | 7.0 | 17.8 | 9.0 | 22.9 | 1370-1950 | 38.8-55.2 | 22.0 | 10.0 |
| 071338004 | 13.5 | 34.3 | 18.0 | 45.7 | 7.0 | 17.8 | 7.0 | 17.8 | 9.0 | 22.9 | 1350-1800 | 38.2-51.0 | 19.9 | 9.1 |
| 071338005 | 13.5 | 34.3 | 15.0 | 38.1 | 7.0 | 17.8 | 7.0 | 17.8 | 7.5 | 19.1 | 1350-1800 | 38.2-51.0 | 17.0 | 7.7 |
| 071338007 | 11.0 | 27.9 | 24.0 | 61.0 | 7.0 | 17.8 | 7.0 | 17.8 | 11.5 | 29.2 | 1200-1700 | 34.0-48.1 | 17.5 | 7.9 |
| 071338008 | 9.75 | 24.8 | 18.0 | 45.7 | 6.0 | 15.2 | 6.0 | 15.2 | 9.0 | 22.9 | 920-1190 | 26.1-33.7 | 12.1 | 5.5 |

Double Grid


| | | | | | | | | | | | | | | |
|------------------------|------|------|------|------|-----|------|-----|------|-----|------|-----------|-----------|-----|-----|
| 071338009 [†] | 13.5 | 34.3 | 24.0 | 61.0 | 7.0 | 17.8 | 7.0 | 17.8 | 9.0 | 22.9 | 1210-1910 | 34.3-54.1 | 9.0 | 5.5 |
|------------------------|------|------|------|------|-----|------|-----|------|-----|------|-----------|-----------|-----|-----|

*With inlet transition mount installed. [†] K = 8.5 in. (21.6 cm) between grids.

Mounting Clamps (2 Required)

| Part No. | Dimensions | | | | | |
|-----------|------------|------|-----|------|-----|------|
| | A | | B | | C | |
| | in. | cm | in. | cm | in. | cm |
| 071921001 | 9.8 | 24.9 | 4.5 | 11.2 | 5.5 | 14.0 |
| 071921002 | 11.0 | 27.9 | 5.0 | 12.7 | 6.1 | 15.5 |
| 071921003 | 13.5 | 34.3 | 6.0 | 15.2 | 7.4 | 18.0 |

Dimensions

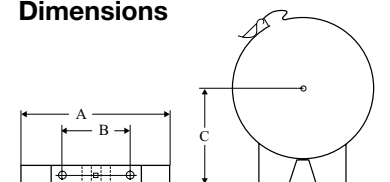


ECO II Inlet Transition Mounting Adapter

Inlet Transition
Installed on ECO-II




Dimensions

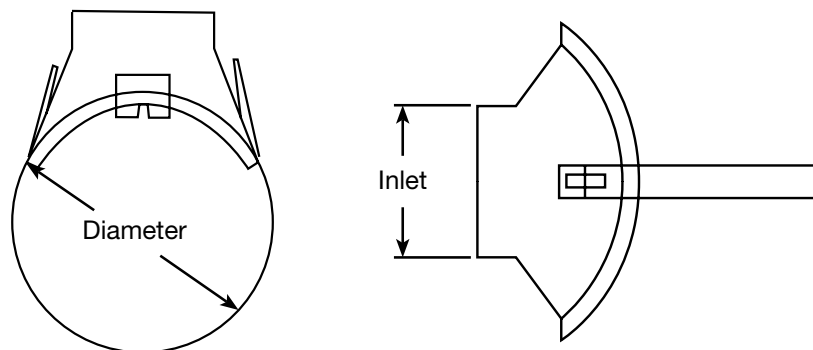

ECO II Inlet Transition

The ECO II was designed to provide lower replacement filter cost on an under hood truck application due to the 2-piece design. The Inlet Transition adapter is a separate piece that stays on the truck and is purchased separately.

The ECO II used without the Inlet Transition has become the standard in the Generator Set market. Air Flow is outside-in with water drain holes around the perimeter.

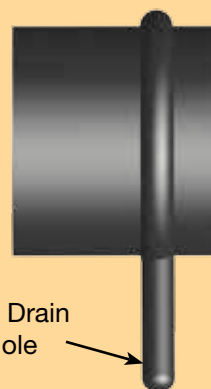

ECO II Inlet Transition With Water Separator

- No Service
- Up to 80% water separation
- Must be installed horizontally
- Drain tube installed

| Specifications | Diameter | | Inlet | |
|------------------------|----------|------|-------|------|
| | in. | cm | in. | cm |
| 073367000 | 9.8 | 24.9 | 6.0 | 15.2 |
| 071656001 | 11.0 | 27.9 | 6.0 | 15.2 |
| 071656002 | 11.0 | 27.9 | 7.0 | 17.8 |
| 072994000 | 13.5 | 34.3 | 7.0 | 17.8 |
| 072995002 ¹ | 13.5 | 34.3 | 7.0 | 17.8 |
| 073086002 ¹ | 13.5 | 34.3 | 7.0 | 17.8 |

¹ Transition mount includes a water separator, for horizontal installations.


ECO-SM (Scheduled Maintenance)

The ECO-SM was designed to give additional mounting flexibility to the OEM customer, while offering a greater value to the fleet that changes filters based on a scheduled maintenance program. Due to the various inlet tube locations, the ECO-SM is ideal for retrofit applications.

The ECO-SM is for outside-in air flow only and has drain holes around the perimeter.



- **Choice of three inlet locations to match new or retrofit applications.**
- **The ECO-SM can be mounted in any orientation or angle.**
- **Economical scheduled maintenance design.**
- **Beaded outlet.**
- **Fast and easy to service with no housing to clean or gaskets to service.**
- **Easy upgrade for existing air cleaners with separate filters.**
- **Drain holes for water removal.**

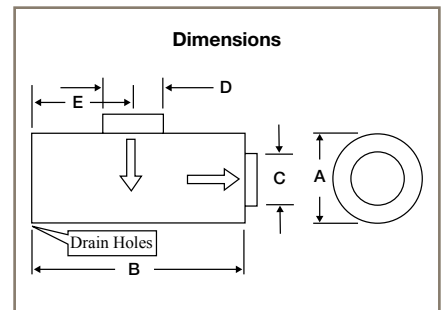


Specifications

| Part No. | Dimensions | | | | | | | | | | Air Flow (CFM) | | Weight | |
|-----------|--------------|------|------------|------|------------|------|-----------|------|------|------|----------------|---------------------|--------|------|
| | (Diameter) A | | (Length) B | | (Outlet) C | | (Inlet) D | | E | | cfm | m ³ /min | lbs | kg |
| | in. | cm | in. | cm | in. | cm | in. | cm | in. | cm | | | | |
| 099842002 | 11.0 | 27.9 | 24.0 | 61.0 | 7.0 | 17.8 | 7.0 | 17.8 | 12.0 | 30.5 | 980-1430 | 27.8-40.5 | 19.0 | 8.6 |
| 099842004 | | | | | | | | | 5.5 | 14.0 | 1100-1670 | 31.1-47.3 | 27.0 | 12.2 |
| 099842005 | 13.5 | 34.3 | 24.0 | 61.0 | 7.0 | 17.8 | 7.0 | 17.8 | 12.0 | 30.5 | 1130-1500 | 32.0-42.5 | 27.0 | 12.2 |
| 099842006 | | | | | | | | | 18.5 | 47.0 | 1030-1500 | 29.2-42.5 | 27.0 | 12.2 |
| 099842007 | 13.5 | 34.3 | 18.0 | 45.7 | 7.0 | 17.8 | 7.0 | 17.8 | 5.5 | 14.0 | 1120-1630 | 31.7-46.2 | 24.0 | 10.9 |
| 099842008 | | | | | | | | | 12.5 | 31.8 | 1060-1550 | 30.0-43.9 | 24.0 | 10.9 |
| 099842009 | 13.5 | 34.3 | 15.0 | 38.1 | 7.0 | 17.8 | 7.0 | 17.8 | 5.5 | 14.0 | 1070-1550 | 30.3-43.9 | 22.5 | 10.2 |
| 099842010 | | | | | | | | | 9.5 | 24.1 | 1060-1530 | 30.0-43.3 | 22.5 | 10.2 |

Mounting Clamps (2 Required)

| Part No. | Dimensions | | | | | |
|-----------|------------|------|-----|------|-----|------|
| | A | | B | | C | |
| | in. | cm | in. | cm | in. | cm |
| 071921002 | 11.0 | 27.9 | 5.0 | 12.7 | 6.1 | 15.5 |
| 071921003 | 13.5 | 34.3 | 6.0 | 15.2 | 7.4 | 18.0 |

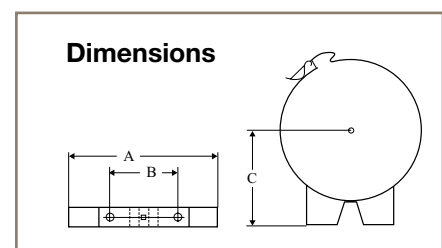




ECO-LL (Long Life)

- Beaded outlet.
- Long life and disposable.
- Use when extended maintenance intervals, or severe service.
- More media surface area than scheduled maintenance style.
- Choice of inlet locations.
- Drain holes for water removal.

The ECO-LL is similar to the ECO-SM, but is for applications where the customer wants to get the longest life from their air filter.

There are also more sizes available.

The ECO-LL is for outside-in air flow only and has drain holes around the perimeter.

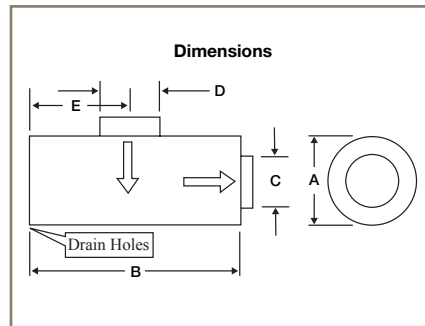


Specifications

| Part No. | Dimensions | | | | | | | | | | Air Flow | | Weight | |
|-----------|--------------|------|------------|------|------------|------|-----------|------|------|------|-----------|---------------------|--------|-----|
| | (Diameter) A | | (Length) B | | (Outlet) C | | (Inlet) D | | E | | cfm | m ³ /min | lbs | kg |
| | in. | cm | in. | cm | in. | cm | in. | cm | in. | cm | | | | |
| 400820001 | | | | | | | | | 5.5 | 14.0 | 985-1475 | 27.9-41.8 | 19.0 | 8.6 |
| 400820002 | 11.0 | 27.9 | 24.0 | 61.0 | 7.0 | 17.8 | 7.0 | 17.8 | 12.0 | 30.5 | 905-1340 | 25.6-37.9 | 19.0 | 8.6 |
| 400820003 | | | | | | | | | 18.5 | 47.0 | 645-950 | 18.3-26.9 | 19.0 | 8.6 |
| 400820004 | | | | | | | | | 5.5 | 14.0 | 1295-1910 | 36.7-54.1 | 21.5 | 9.8 |
| 400820005 | 13.5 | 34.3 | 24.0 | 61.0 | 7.0 | 17.8 | 7.0 | 17.8 | 12.0 | 30.5 | 1170-1735 | 33.1-49.1 | 21.5 | 9.8 |
| 400820006 | | | | | | | | | 18.5 | 47.0 | 845-1250 | 23.9-35.4 | 21.5 | 9.8 |
| 400820007 | 13.5 | 34.3 | 18.0 | 45.7 | 7.0 | 17.8 | 7.0 | 17.8 | 5.5 | 14.0 | 1115-1590 | 31.6-54.0 | 17.0 | 7.7 |
| 400820008 | | | | | | | | | 12.5 | 31.8 | 1100-1545 | 31.1-43.7 | 17.0 | 7.7 |
| 400820009 | 13.5 | 34.3 | 15.0 | 38.1 | 7.0 | 17.8 | 7.0 | 17.8 | 5.5 | 14.0 | 1055-1560 | 29.9-44.2 | 15.1 | 6.8 |
| 400820010 | | | | | | | | | 9.5 | 24.1 | 1135-1690 | 32.1-47.9 | 15.1 | 6.8 |
| 400820012 | 9.8 | 24.9 | 24.0 | 61.0 | 6.0 | 15.2 | 6.0 | 15.2 | 12.0 | 30.5 | 820-1215 | 23.2-34.4 | 13.1 | 5.9 |
| 400820014 | 11.0 | 27.9 | 18.0 | 45.7 | 7.0 | 17.8 | 7.0 | 17.8 | 5.5 | 14.0 | 970-1455 | 27.5-41.2 | 13.5 | 6.1 |
| 400820015 | | | | | | | | | 12.5 | 31.8 | 715-1075 | 20.2-30.4 | 13.5 | 6.1 |
| 400820019 | 11.0 | 27.9 | 13.0 | 33.0 | 7.0 | 17.8 | 7.0 | 17.8 | 7.5 | 19.1 | 710-1100 | 20.1-31.1 | 10.2 | 4.6 |
| 400820020 | 11.0 | 27.9 | 15.0 | 38.1 | 7.0 | 17.8 | 7.0 | 17.8 | 7.5 | 19.1 | 820-1230 | 23.2-34.8 | 11.5 | 5.2 |
| 400820021 | | | | | | | | | 7.5 | 19.1 | 740-1100 | 21.0-31.1 | 11.5 | 5.2 |
| 400820022 | 11.0 | 27.9 | 18.0 | 45.7 | 6.0 | 15.2 | 7.0 | 17.8 | 12.5 | 31.8 | 650-960 | 18.4-27.2 | 12.8 | 5.8 |
| 400820023 | 11.0 | 27.9 | 13.0 | 33.0 | 6.0 | 15.2 | 7.0 | 17.8 | 7.5 | 19.1 | 720-1060 | 20.4-30.0 | 10.2 | 4.6 |

Mounting Clamps (2 Required)

| Part No. | Dimensions | | | | | |
|-----------|------------|------|-----|------|-----|------|
| | A | | B | | C | |
| | in. | cm | in. | cm | in. | cm |
| 071921001 | 9.8 | 24.9 | 4.5 | 11.4 | 5.5 | 14.0 |
| 071921002 | 11.0 | 27.9 | 5.0 | 12.7 | 6.1 | 15.5 |
| 071921003 | 13.5 | 34.3 | 6.0 | 15.2 | 7.4 | 18.8 |
| 071921006 | 15.0 | 38.1 | 6.0 | 15.2 | 8.2 | 20.8 |

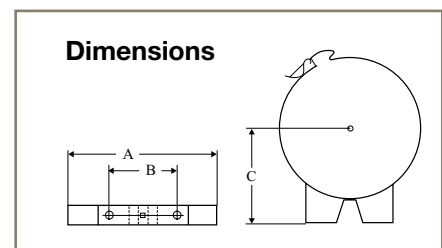


ECOLITE

The original ECO Series product, the ECOLITE is still the only air filter in the industry that you can flow air in either direction. This allows a variety of installation options with the same part number replacement filter.

The ECOLITE can be mounted in any orientation or convenient location; under the hood or outside, direct or remote.



- Beaded inlet/outlet.
- Tapered offset cone design assures uniform air distribution, minimizes air restriction and maximizes filter service life.
- The only air filter available with choice of flow directions in a single part number.
- Positive barrier, pleated paper media is set in a superior quality adhesive for a permanent seal.
- Airflow may enter or exit either opening.

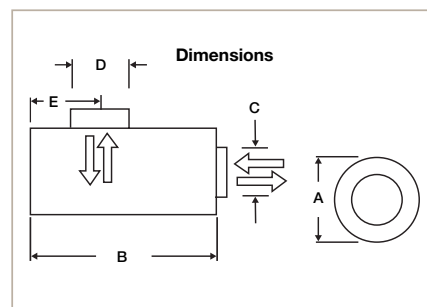


Specifications

| Part No. | Dimensions | | | | | | | | | | Air Flow | | Weight | |
|-----------|--------------|------|------------|------|------------|------|-----------|------|------|------|-----------|-----------|--------|------|
| | (Diameter) A | | (Length) B | | (Outlet) C | | (Inlet) D | | E | | cfm | m³/min | lbs | kg |
| | in. | cm | in. | cm | in. | cm | in. | cm | in. | cm | | | | |
| 062891001 | 9.8 | 24.9 | 24.0 | 61.0 | 6.0 | 15.2 | 6.0 | 15.2 | 5.5 | 14.0 | 820-1200 | 23.2-34.0 | 16.0 | 7.3 |
| 062891002 | 11.0 | 27.9 | 24.0 | 61.0 | 7.0 | 17.8 | 7.0 | 17.8 | 5.5 | 14.0 | 1100-1650 | 31.1-46.7 | 19.0 | 8.6 |
| 062891003 | 13.5 | 34.3 | 24.0 | 61.0 | 7.0 | 17.8 | 7.0 | 17.8 | 5.5 | 14.0 | 1375-1900 | 38.9-53.8 | 27.0 | 12.2 |
| 062891004 | 13.5 | 34.3 | 18.0 | 45.7 | 7.0 | 17.8 | 7.0 | 17.8 | 5.5 | 14.0 | 1070-1590 | 30.3-45.0 | 16.3 | 7.4 |
| 062891007 | 9.8 | 24.9 | 24.0 | 61.0 | 6.0 | 15.2 | 6.0 | 15.2 | 12.0 | 30.5 | 820-1200 | 23.2-34.0 | 16.0 | 7.3 |
| 062891010 | 13.5 | 34.3 | 15.0 | 38.1 | 7.0 | 17.8 | 7.0 | 17.8 | 5.5 | 14.0 | 1025-1540 | 29.0-43.6 | 15.3 | 6.9 |
| 124923000 | 11.0 | 27.9 | 24.0 | 61.0 | 7.0 | 17.8 | 7.0 | 17.8 | 18.5 | 47.0 | 860-940 | 24.4-26.6 | 19.0 | 8.6 |

Mounting Clamps (2 Required)

| Part No. | Dimensions | | | | | |
|-----------|------------|------|-----|------|-----|------|
| | A | | B | | C | |
| | in. | cm | in. | cm | in. | cm |
| 071921001 | 9.8 | 24.9 | 4.5 | 11.4 | 5.5 | 14.0 |
| 071921002 | 11.0 | 27.9 | 5.0 | 12.7 | 6.1 | 15.5 |
| 071921003 | 13.5 | 34.3 | 6.0 | 15.2 | 7.4 | 18.8 |

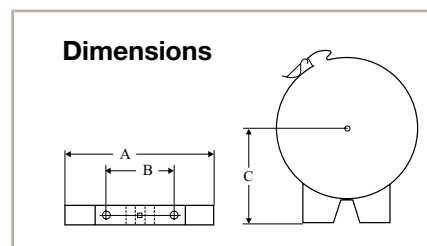


ECO-BC (Behind the Cab)



Beaded inlet
inside-out air flow
for vertical applications only

Rugged Construction

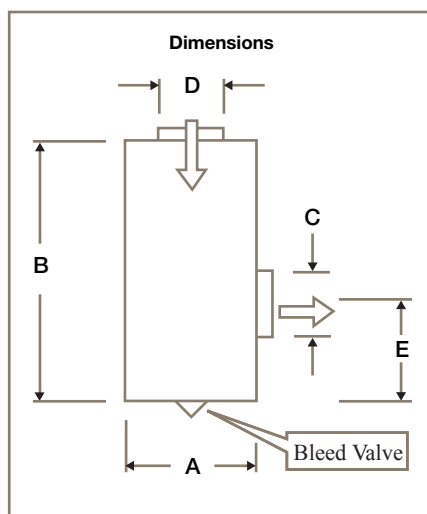

Designed for behind the truck cab installations, the ECO-BC must be mounted vertically with an inside-out air flow. The ECO-BC air filter can be used for under the hood applications also, and the rubber drain valve in the bottom base allows for water and dirt to easily drain out.

This disposable air cleaner features a slimline vertical design for tight or limited space installations.




Specifications

| Part No. | Dimensions | | | | | | | | | | Air Flow | | Weight | |
|-----------|-----------------|------|---------------|------|--------------------|------|--------------|------|-----|------|-----------|---------------------|--------|------|
| | (Diameter) A | | (Length) B | | (Outlet) O.D. C | | (Inlet) D | | E | | cfm | m ³ /min | lbs | kg |
| | in. | cm | in. | cm | in. | cm | in. | cm | in. | cm | | | | |
| 094973001 | 11.0 | 27.9 | 24.0 | 61.0 | 7.0 | 17.8 | 7.0 | 17.8 | 5.5 | 14.0 | 1120-1600 | 31.7-45.3 | 19.0 | 8.6 |
| 094973002 | 13.5 | 34.3 | 24.0 | 61.0 | 7.0 | 17.8 | 7.0 | 17.8 | 5.5 | 14.0 | 1450-1750 | 41.1-49.6 | 27.0 | 12.2 |
| 094973003 | 9.8 | 24.9 | 24.0 | 61.0 | 6.0 | 15.2 | 6.0 | 15.2 | 5.5 | 14.0 | 875-1250 | 24.8-35.4 | 16.0 | 7.3 |
| 094973004 | 9.8 | 24.9 | 18.0 | 45.7 | 6.0 | 15.2 | 6.0 | 15.2 | 9.0 | 22.9 | 720-1060 | 20.4-30.0 | 10.4 | 4.7 |
| 094973005 | 13.5 | 34.3 | 15.0 | 38.1 | 7.0 | 17.8 | 7.0 | 17.8 | 9.5 | 24.1 | 980-1470 | 27.8-41.6 | 15.3 | 6.9 |
| 094973006 | 11.0 | 27.9 | 18.0 | 45.7 | 7.0 | 17.8 | 6.0 | 15.2 | 5.5 | 14.0 | 810-1200 | 22.9-34.0 | 12.6 | 5.7 |
| 094973007 | 11.0 | 27.9 | 18.0 | 45.7 | 7.0 | 17.8 | 7.0 | 17.8 | 5.5 | 14.0 | 1010-1490 | 28.6-42.2 | 12.5 | 5.7 |

Mounting Clamps (2 Required)

| Part No. | Dimensions | | | | | |
|-----------|------------|------|-----|------|-----|------|
| | A | | B | | C | |
| | in. | cm | in. | cm | in. | cm |
| 071921001 | 9.8 | 24.9 | 4.5 | 11.4 | 5.5 | 14.0 |
| 071921002 | 11.0 | 27.9 | 5.0 | 12.7 | 6.1 | 15.5 |
| 071921003 | 13.5 | 34.3 | 6.0 | 15.2 | 7.4 | 18.8 |

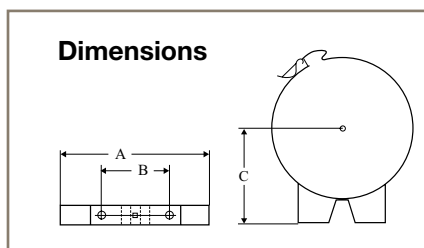


ECO III

Parker Racor Engineering Has Raised The Bar on Air Filtration Media Technology

The ECO III housing is the tangential orientation of the 7" inlet, which directs air flow evenly around the filter, thus expanding filter life and saving you money.

A CCV port enables a closed crankcase ventilation system exhaust line to easily be connected, creating an environmentally sound system.

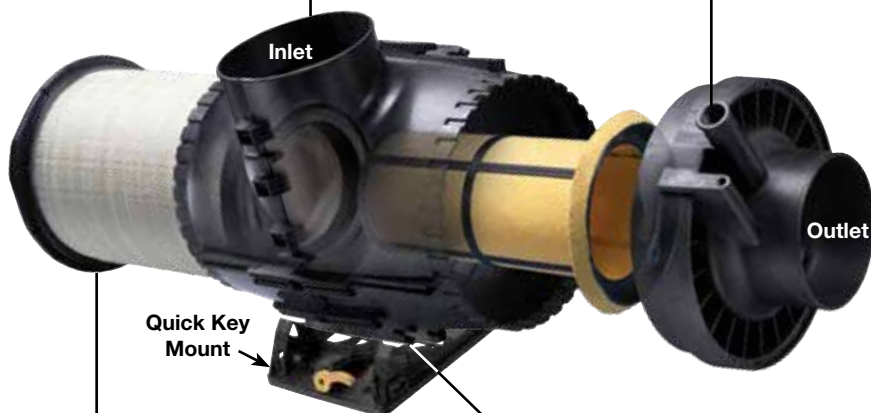

Two molded handles on an extended edge lip, lets your hands grasp firmly to easily remove the filter. Metal clasps provide an air-tight seal without using tools.

The housing can be rotated 180° and securely locked into place. The 6" outlet port is field reversible, and orientation of the 7" inlet port is adjustable within 20° increments.

Easiest Air Filter to Service, Ever

- Easiest to Specify
- Easiest to Install

With ECO III, Racor engineers have not only revolutionized the performance of air filtration, but also how the unit is installed and serviced.

It's a mounting system invented for flexibility and convenience. The reversible base mounting bracket and included hardware mounts quickly, in any direction to frame rail or firewall. This complete mounting system eliminates the need for custom made, field-engineered and installed brackets a significant savings of time and money.



- **Proprietary treated moisture-bloc media is water resistant. When moisture-bloc is combined with Racor water-separating intake scoops, you have an exceptional, fast-draining air filtration system.**
- **This new ECO III filter is computer design optimized to provide maximum efficiency at lowest possible long term cost per mile.**
- **In severe duty, or when an extra measure of protection is desired, Racor provides a secondary, or safety filter. Its inverted cone design adds surface area helping to reduce pressure drop significantly without affecting flow. In**

addition to adding insurance in the unlikely event of a primary filter failure, the safety filter remains in place during primary filter service, further reducing the opportunity for contaminants to reach the turbocharger and engine components.

- **With a full 2" pleat depth, total capacity is approximately 100 square feet of media providing a flow range of up to 900 CFM.**
- **Proven Racor pleat separation technology system supports the pleats inside and outside for overall strength and durability. There are no metal components that can cause filter media wear damage.**

- **There is no metal in either the primary or safety (secondary) filters – they are completely incinerable.**
- **ECO III media is sealed with adhesive urethane to the end cap which eliminates the chance of contaminants leaking during operation or service.**
- **Systems where the contaminated airflow enters the unit at a right angle can experience dust loading on the filter intake. Because the ECO III housing disperses contaminated airflow around the filter, dust loading is uniform across the entire area of the filter resulting in a longer change-out interval.**

ECO III is a Quantum Leap in Air Filtration System Design

ECO III is the result of a focused, collaborative effort between Racor engineering and our customers. On-highway, real-world testing and laboratory certification has resulted in the advanced ECO III product line. State-of-the-art materials and design features result in installation flexibility, superior performance, ease of service, and unmatched customer satisfaction.

Smaller and Better

ECO III is designed for 250-400 horsepower engines for over-the-road vehicles, including buses and specialty applications. Because ECO III delivers high efficiency in a small overall package design, the air filtration system can be located closer to turbochargers for increased performance. Furthermore, the smaller unit size frees valuable space in the engine compartment.

ECO III

4 Levels of Protection Means ECO III is Sealed for Maximum Engine Protection

Introduction to contamination during operation and at service time is a significant maintenance issue. The ECO-III assures a clean service and safely keeps the dirt out.

1. A sealing surface allows removal of safety filter which wipes and captures dirt on the surface as it is removed.



3. A continuous ring seal (only if safety filter is employed) is provided at the interface between the primary and safety filter.



2. An external radial seal rings the outlet of the filter housing to prevent contamination from escaping into the engine.

4. Interior seal adds a second level of protection.



| Specification | ECO III LH | ECO III | ECO III XL13 | ECO III XL15 |
|---|------------------------------------|------------------------------------|------------------------------------|--------------------------------------|
| Mounting Clamps | N/A | N/A | 071921010 (2 required) | 071921009 (2 required) |
| Assembly Number: With Safety Filter Without Safety Filter | N/A 500235002 | 500250012 500251012 | ECO-III-XL13S ECO-III-XL13 | ECO-III-XL15S ECO-III-XL15 |
| Primary Filter | 500293112 | 500247012 | 500454001 | 500375001 |
| Safety Filter | N/A | 500233000 | 500455001 | 500443001 |
| Diameter | 12.3 in. (31.2 cm) | 13.0 in. (33.0 cm) | 13.0 in. (33.0 cm) | 15.0 in. (38.1 cm) |
| Width | 14.1 in. (35.8 cm) | 20.5 in. (52.1 cm) | 22.0 in. (55.9 cm) | 24.0 in. (61.0 cm) |
| Air Flow | 700 CFM (19.8 m ³ /min) | 900 CFM (25.5 m ³ /min) | 800 CFM (22.7 m ³ /min) | 1,000 CFM (28.3 m ³ /min) |
| Inlet | 6.0 in. (15.2 cm) | 7.0 in. (17.8 cm) | 6.0 in. (15.2 cm) | 7.0 in. (17.8 cm) |
| Outlet | 5.0 in. (12.7 cm) | 6.0 in. (15.2 cm) | 6.0 in. (15.2 cm) | 6.0 in. (15.2 cm) |



The Racor ECO-Vent Filter prevents contamination from entering the DEF tank.

It is made using DEF compatible proprietary engineered materials. The mounting bracket is E-coated steel, which resists corrosion from DEF and the environment.

Current vehicle applications typically do not have a vent filtration system on the DEF tank, but now you can protect your tank and components with the new Racor ECO-Vent filter. ECO-Vent has successfully completed over a million miles of road testing under severe conditions. In addition, it has passed ISO 5011 air filtration testing, thermo-cycling, vibration testing, and Urea compatibility testing.

When the engine is running and Selective Catalytic Reduction (SCR) is active, contaminated air is drawn into the bottom inlet of the Racor ECO-Vent as the Diesel Exhaust Fluid (DEF) is used.

The air first flows past a closed umbrella valve, and then into a holding chamber that traps particles and condenses water, which then drains back out the inlet. Stopping bulk water and larger dirt particles in the holding chamber protects the proprietary barrier media.

Any fine contaminant that reaches the vent filter element is trapped, and any collected water is coalesced on the element surface and returned to the reservoir area, where it drains out the bottom. Clean, dry air then flows to the DEF tank. Any tank splash (urea) getting back to the filter, flows from the top of the housing through a central tube, opens the umbrella valve, and drains from the housing.


Suggested replacement interval is once per year.

ECO-Vent

DEF Tank Vent Filter



Filter Flow Diagram

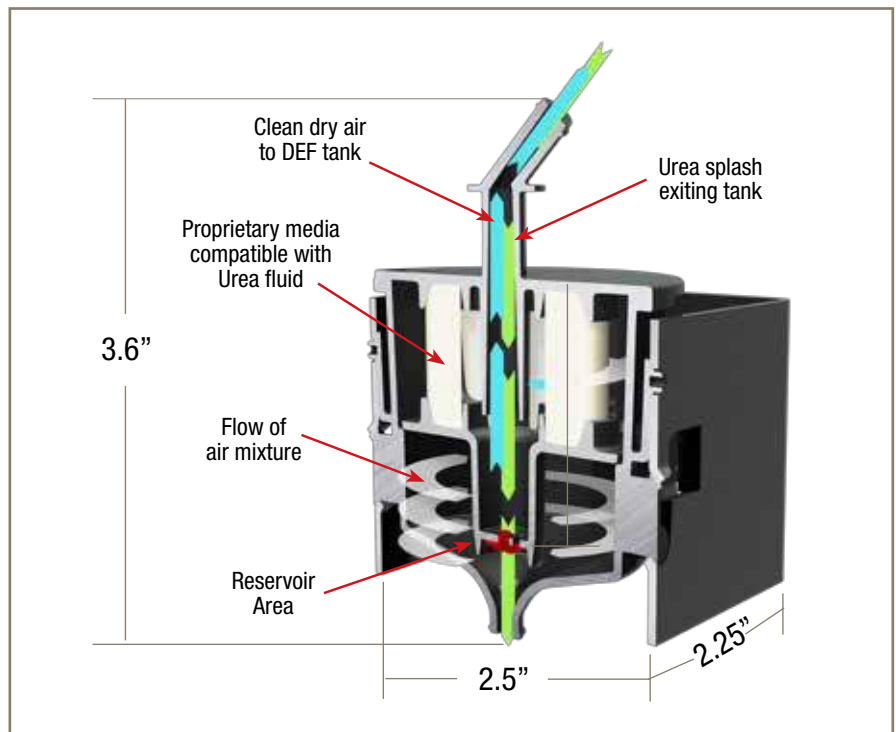

| Part Numbers | Description |
|--------------|-----------------------------|
| PFA500675000 | Filter and bracket assembly |
| PFA500676000 | Replacement filter |

| Product Specifications | |
|------------------------|--------------------|
| Element Diameter | 2.25 in. |
| Height | 3.58 in. |
| Bracket | 2.5 in. x 2.25 in. |

Ember Separator/ Moister Separator



| Part No. | Width | Height | Area (Sq. ft.) |
|-----------|--------------------|--------------------|----------------|
| 123970001 | 20.0 in. (50.8 cm) | 8.0 in. (20.3 cm) | 1.11 |
| 123970002 | 8.6 in. (21.8 cm) | 7.9 in. (20.1 cm) | 0.47 |
| 123970003 | 20.0 in. (50.8 cm) | 5.5 in. (14.0 cm) | 0.76 |
| 123970004 | 9.0 in. (22.9 cm) | 20.8 in. (52.8 cm) | 1.29 |
| 123970005 | 12.0 in. (30.1 cm) | 9.5 in. (24.1 cm) | 0.79 |
| 123970006 | 10.8 in. (27.4 cm) | 9.3 in. (23.6 cm) | 0.69 |
| 123970007 | 20.8 in. (52.8 cm) | 11.3 in. (28.7 cm) | 1.62 |
| 123970008 | 15.0 in. (38.1 cm) | 4.0 in. (10.2 cm) | 0.42 |
| 123970009 | 7.8 in. (19.8 cm) | 7.8 in. (19.8 cm) | 0.42 |
| 123970010 | 5.9 in. (15.0 cm) | 20.6 in. (52.3 cm) | 0.84 |
| 123970011 | 8.0 in. (20.3 cm) | 9.0 in. (22.9 cm) | 0.50 |
| 123970012 | 5.5 in. (14.0 cm) | 16.3 in. (41.4 cm) | 0.62 |
| 123970013 | 25.0 in. (63.5 cm) | 3.5 in. (8.9 cm) | 0.61 |
| 123970014 | 3.5 in. (88.9 cm) | 12.0 in. (30.5 cm) | 0.29 |
| 123970015 | 15.5 in. (39.4 cm) | 8.0 in. (20.3 cm) | 0.86 |
| 123970016 | 8.8 in. (22.4 cm) | 23.0 in. (58.4 cm) | 1.40 |
| 123970017 | 12.8 in. (32.5 cm) | 5.3 in. (13.5 cm) | 0.47 |
| 123970018 | 9.5 in. (24.1 cm) | 5.3 in. (13.5 cm) | 0.35 |
| 123970019 | 7.0 in. (17.8 cm) | 16.0 in. (40.6 cm) | 0.78 |
| 123970020 | 6.8 in. (17.3 cm) | 11.9 in. (30.2 cm) | 0.57 |
| 123970021 | 17.1 in. (43.4 cm) | 11.4 in. (29.0 cm) | 1.35 |
| 123970022 | 16.3 in. (41.4 cm) | 5.5 in. (14.0 cm) | 0.62 |
| 123970023 | 5.5 in. (14.0 cm) | 10.0 in. (25.4 cm) | 0.38 |
| 123970024 | 22.0 in. (55.9 cm) | 4.0 in. (10.2 cm) | 0.61 |
| 123970025 | 19.0 in. (48.3 cm) | 16.0 in. (40.6 cm) | 2.11 |
| 123970026 | 25.2 in. (64.0 cm) | 4.4 in. (11.2 cm) | 0.77 |
| 123970027 | 11.1 in. (28.2 cm) | 5.31 in. (13.5 cm) | 0.41 |
| 123970028 | 11.9 in. (30.2 cm) | 3.0 in. (7.6 cm) | 0.25 |

All Racor Ember Separators have a depth of 1".

* Optional faceplate can be provided.



Ember protection is extremely important in order to protect fire suppression equipment as well as human life. The Racor Moisture Ember Separator (MES) protects the downstream air filter from embers using a combination of unique flat and crimped metal screens constructed into a galvanized steel frame. This multi layered screen design traps embers and allows them to burn out before passing through the pack, while creating only minimal air flow restriction through the system.

In the event of fire hot embers may burn holes in the air filter, allowing dirt, sand, smoke and other particles to contaminate and shut down the engine, often beyond repair. Even worse, a burning air filter may lead to a major vehicle fire. Also, large amounts of free water in the cylinders can result in broken pistons or bent rods. The Racor Moisture & Ember Separator is specifically designed to help separate hot embers from entering the engine intake. Meets NFPA guidelines.

Note: Periodic cleaning or replacement of the screen is all that's required after installation.

For design considerations, the velocity through the ember separator should not exceed 1000 feet per minute (FPM).

Velocity, FPM = flow rate (cfm)/ember separator area (square feet).

Features:

- Removes embers from air flow.
- One inch thick.
- Can be used as a moisture separator.

UniPamic® Light & Medium Service Air Cleaners

UniPamic Series Air Cleaners provide unmatched engine protection for a wide range of equipment, from on-highway trucks to compressors, stationary engines to marine engines.

Greatest Protection

The Pamic filter media meets and exceeds all engine manufacturer performance requirements per the ISO-5011 Test Standard. It begins at a high level and continues to increase throughout the life of the filter.

Extended Service Life

The unique construction of the Pamic filter with its exclusive mechanical pleat separation, provides more usable filter area than any competitive air cleaner, thus offering longer filter life. UniPamic models feature an efficient moisture separator panel which removes over 90% of the water that may enter the face of the air cleaner. AutoPamic® models can be upgraded to include a gravity-discharged dust pre-cleaner. RotoPamic® models are upgradeable to either a compressed air or exhaust-aspirated pre-cleaner.

An optional, easy-to-use service indicator tells when to change the filter assuring maximum usage and lowest operating filter costs.


Increased Horsepower, Reduced Fuel Consumption

With low intake air restriction and greater effective media area than other dry-type air cleaners, the Pamic Series offers improved fuel economy, and that lowers per hour operating costs.

Easy To Service

No special tools or techniques required, dirt is held inside the pleated filter tubes. The filter is replaced from the dirty side of the air cleaner, reducing the danger of engine contamination.

Pamic® Series

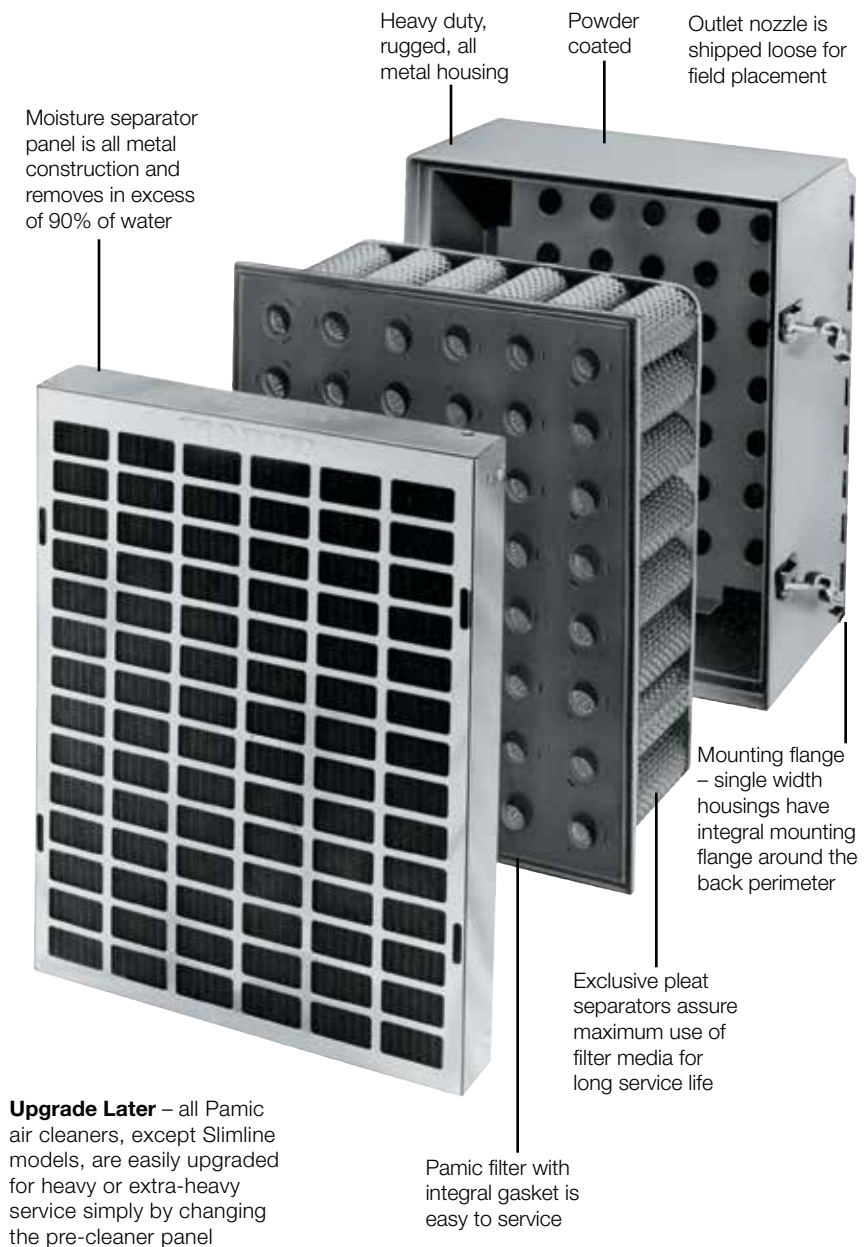

UniPamic (Single Stage)

Basic Unipamic Kits

| Part No. | | | No. of Tubes | | | Port Size | Application | | Dimensions | | | |
|------------------------|--------------------|---------------|------------------|------|------|--------------------------|-----------------------|---------------|---------------------|------|--------------|-------------|
| Kit Number* | Moisture Separator | Filter Number | Total | Wide | High | Outlet Nozzle O.D. (In.) | Flow Rate Range (CFM) | Hp Range | Approx. Ship Weight | | Height (In.) | Width (In.) |
| | | | | | | | | | (lbs) | (Kg) | | |
| 062701003 | 056519010 | 012233003 | 9 | 3 | 3 | 3.0 | 100 - 250 | 50 - 125 | 25 | 11 | 8.59 | 8.59 |
| 062701004 | 056519011 | 012233004 | 12 | 3 | 4 | 3.0 | 250 - 300 | 125 - 150 | 30 | 14 | 8.59 | 10.91 |
| 062701010 | 056519016 | 012233007 | 24 | 4 | 6 | 4.0 | 350 - 600 | 175 - 300 | 44 | 20 | 10.91 | 15.53 |
| 062701012 | 056519002 | 012233008 | 32 | 4 | 8 | 5.0 | 500 - 800 | 250 - 400 | 55 | 25 | 10.91 | 20.16 |
| 062701013 | 056519003 | 012233009 | 40 | 5 | 8 | 5.0 | 600 - 1,000 | 300 - 500 | 62 | 28 | 13.22 | 20.16 |
| 062701014 | 056519004 | 012233010 | 48 | 6 | 8 | 6.0 | 700 - 1,200 | 350 - 600 | 69 | 31 | 15.53 | 20.16 |
| 062701015 | 056519005 | 012233011 | 64 | 8 | 8 | 6.0 | 1,000 - 1,600 | 500 - 800 | 79 | 36 | 20.16 | 20.16 |
| 059709000 [†] | 056519003 x2 | 012233009 x2 | 80 [†] | 8 | 10 | 5.5 x2 | 1,200 - 2,000 | 600 - 1,000 | 119 | 54 | 27.81 | 20.16 |
| 059711000 [†] | 056519004 x2 | 012233010 x2 | 96 [†] | 8 | 12 | 6.0 x2 | 1,400 - 2,400 | 700 - 1,200 | 132 | 60 | 32.44 | 20.16 |
| 059713000 | 065619005 x2 | 012233011 x2 | 128 [†] | 8 | 16 | 6.0 x2 | 2,000 - 3,200 | 1,000 - 1,600 | 155 | 70 | 41.69 | 20.16 |

* Nozzle or outlet not included. Must be ordered separately.


[†] Double side-by-side housing. Two air outlet nozzles required. There are no integral flanges on double housing.

All Units are right-hand bleed. Left-hand bleed can be custom ordered.

¹ Special order. Contact Racor for details.

Replacement Filters

Air Inlet/Outlet Sleeves/Nozzles

| Part No. | Diameter | | Sleeves | Length | | Weight | |
|-----------|----------|------|---|--------|------|--------|-----|
| | in. | cm | | in. | cm | lbs | kg |
| 015382500 | 5.0 | 12.7 |  | 4.0 | 10.2 | 1.5 | 0.7 |
| 015382508 | 5.5 | 14.0 | | 4.0 | 10.2 | 2.0 | 0.9 |
| 015382600 | 6.0 | 15.2 | | 4.0 | 10.2 | 2.0 | 0.9 |

| Nozzles | | | | | | | |
|-----------|-----|------|---|-----|-----|-----|-----|
| 041199001 | 3.0 | 7.6 |  | 1.5 | 3.8 | 0.7 | 0.3 |
| 041199003 | 4.0 | 10.2 | | 1.6 | 4.1 | 1.0 | 0.5 |
| 041199004 | 5.0 | 12.7 | | 1.9 | 4.8 | 1.2 | 0.5 |
| 041199005 | 5.5 | 14.0 | | 2.1 | 5.3 | 1.4 | 0.6 |
| 041199006 | 6.0 | 15.2 | | 2.1 | 5.3 | 1.6 | 0.7 |
| 041199007 | 7.0 | 17.8 | | 2.1 | 5.3 | 2.5 | 1.1 |

| Part No. | Tubes | Arrangement* |
|-----------|-------|--------------|
| 012233001 | 2 | 1 x 2 |
| 012233002 | 4 | 2 x 2 |
| 012233012 | 6 | 2 x 3 |
| 012233003 | 9 | 3 X 3 |
| 012233004 | 12 | 3 X 4 |
| 012233014 | 12 | 2 X 6 |
| 012233005 | 16 | 4 X 4 |
| 012233018 | 16 | 2 X 8 |
| 012233017 | 18 | 3 X 6 |
| 012233006 | 20 | 4 X 5 |
| 012233007 | 24 | 4 X 6 |
| 012233019 | 24 | 3 X 8 |
| 012233015 | 30 | 5 X 6 |
| 012233008 | 32 | 4 X 8 |
| 012233020 | 36 | 6 X 6 |
| 012233009 | 40 | 5 X 8 |
| 012233010 | 48 | 6 X 8 |
| 012233011 | 64 | 8 X 8 |

* Pamic air filters will fit either vertical or horizontal housings.

* Four tube model is special order only.

[†] Indicates two moisture separator panels and two filters in a single housing.

* Airflow capacities beyond maximum recommendations will result in higher resistance and reduced filter life.

AutoPamic Air Cleaners For Medium and Heavy Service

Medium service includes most on- and off-highway uses such as gravel and ready-mix trucks, outdoor generator sets, garbage trucks, fire trucks, air compressors, and pumps.


This AutoPamic air cleaner model with a gravity discharge pre-cleaner is the easiest to install. It may be used on all types of engines.

Note: Media meets and exceeds all engine manufacturer performance requirements per the ISO-5011 Test Standard.



AutoPamic

Two Stage Medium to Extra Heavy Service Air Cleaners

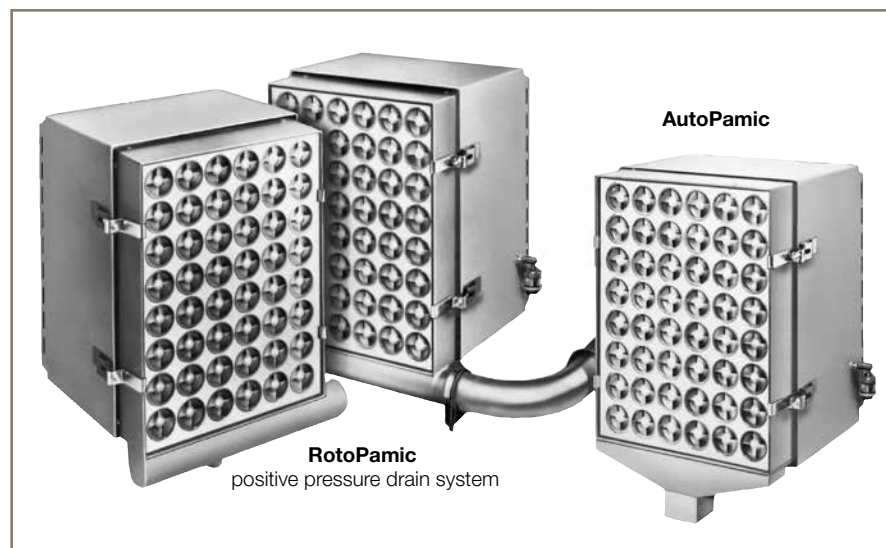

AutoPamic and RotoPamic Sizing

The chart below shows the number of filter tubes needed to meet engine air flow requirements. Match the CFM of your engine to the type of service the air cleaner will experience. Recommended air cleaner size, for type of service shown, has been calculated for an optimum range of engine intake restriction, dirt-holding capacity, and filter service life.

Basic AutoPamic Gravity Discharge Kits

| Part No. | | No. of Tubes | | | Port Size | Application | | Dimensions | | | |
|-------------|---------------|--------------|------|------|--------------------------------------|-----------------------|-------------|---------------------|------|--------------|-------------|
| Kit Number* | Filter Number | Total | Wide | High | Recommended Outlet Nozzle O.D. (In.) | Flow Rate Range (CFM) | HP Range | Approx. Ship Weight | | Height (In.) | Width (In.) |
| | | | | | | | | (lbs) | (Kg) | | |
| 062705001 | 012233003 | 9 | 3 | 3 | 3.0 | 150 - 200 | 75 - 100 | 32 | 15 | 8.59 | 8.59 |
| 062705002 | 012233004 | 12 | 3 | 4 | 3.0 | 175 - 250 | 80 - 125 | 37 | 17 | 8.59 | 10.91 |
| 062705008 | 012233007 | 24 | 4 | 6 | 4.0 | 350 - 450 | 175 - 225 | 62 | 28 | 10.91 | 15.53 |
| 062705010 | 012233008 | 32 | 4 | 8 | 5.0 | 450 - 650 | 225 - 325 | 71 | 32 | 10.91 | 20.16 |
| 062705011 | 012233009 | 40 | 5 | 8 | 5.0 | 600 - 800 | 300 - 400 | 84 | 38 | 13.22 | 20.16 |
| 062705012 | 012233010 | 48 | 6 | 8 | 6.0 | 700 - 950 | 350 - 475 | 93 | 42 | 15.53 | 20.16 |
| 062705013 | 012233011 | 64 | 8 | 8 | 6.0 | 950 - 1,280 | 475 - 640 | 111 | 50 | 20.16 | 20.16 |
| 059714000 | 012233009 x2 | 80† | 8 | 10 | 5.5 x2 | 1,200 - 1,600 | 600 - 800 | 160 | 73 | 27.81 | 20.16 |
| 059718000 | 012233011 x2 | 128† | 8 | 16 | 6.0 x2 | 1,900 - 2,560 | 950 - 1,280 | 217 | 99 | 41.69 | 20.16 |

* Nozzle or outlet not included. Must be ordered separately.

† Double side-by-side housing. Two air outlet nozzles required. There are no integral flanges on double housing.

All Units are right-hand bleed. Left-hand bleed can be custom ordered.

RotoPamic Air Cleaners

Heavy Service Applications

Heavy service includes off-highway trucks, motor graders, crawler tractors, scrapers, cranes and shovels.

shovels, rock drilling and quarrying compressors, and full-tracked low-speed tractors.

Extra-heavy service includes such equipment as large scrapers, rock drills, rough terrain cranes, and

These pre-cleaners provide maximum service life of the disposable Pamic filter.

Positive Pressure Bleed System

Positive pressure bleed systems can be used on all turbocharged engines and two-cycle Detroit Diesel turbocharged or naturally aspirated engines. They can also be used wherever a continuous source of compressed air (4 PSIG or greater) is

available, such as the receiver tank on an air compressor.

Note: Media meets and exceeds all engine manufacturer performance requirements per the ISO-5011 Test Standard.



Basic two stage kits include:

- AutoPamic Pre-Cleaner
- RotoPamic Pre-Cleaner
- Pamic Filter
- Air Cleaner Housing
- Service Indicator
- Gravity Discharge

Positive Pressure

- Pamic Filter
- Air Cleaner Housing
- Service Indicator

Note: Outlet nozzle must be ordered separately.

RotoPamic Kits

| Part No. | | No. of Tubes | | | | Application | | Dimensions | | | |
|-------------|---------------|--------------|------|------|--------------------------------------|-----------------------|------------|---------------------|------|--------------|-------------|
| Kit Number* | Filter Number | Total | Wide | High | Recommended Outlet Nozzle O.D. (In.) | Flow Rate Range (CFM) | HP Range | Approx. Ship Weight | | Height (In.) | Width (In.) |
| | | | | | | | | (lbs) | (Kg) | | |
| 062713003 | 012233007 | 24 | 4 | 6 | 4.0 | 200 - 400 | 100 - 200 | 59 | 27 | 10.91 | 15.53 |
| 062713007 | 012233008 | 32 | 4 | 8 | 5.0 | 400 - 550 | 200 - 275 | 70 | 32 | 10.91 | 20.16 |
| 062713009 | 012233009 | 40 | 5 | 8 | 5.0 | 550 - 675 | 275 - 325 | 82 | 37 | 13.22 | 20.16 |
| 062713011 | 012233010 | 48 | 6 | 8 | 6.0 | 670 - 800 | 325 - 400 | 92 | 42 | 15.53 | 20.16 |
| 062713013 | 012233011 | 64 | 8 | 8 | 6.0 | 800 - 1000 | 400 - 500 | 111 | 50 | 20.16 | 20.16 |
| 067874000 | 012233010 x2 | 96† | 8 | 12 | 6.0 x2 | 1300 - 1600 | 650 - 800 | 168 | 76 | 32.44 | 20.16 |
| 067876000 | 012233011 x2 | 128† | 8 | 16 | 6.0 x2 | 1600 - 2200 | 800 - 1100 | 209 | 95 | 41.69 | 20.16 |

* Nozzle or outlet not included. Must be ordered separately.

† Double side-by-side housing. Two air outlet nozzles required. There are no integral flanges on double housing.

Note: All units must be custom ordered. Please call for options and quote.

Features

Easy to Install

Available in three sizes, for either horizontal or vertical mounting. The integral mounting flange meets the needs of most "bolt-on" applications. A wide selection of flexible fittings, clamps and couplings to connect the air cleaner to the engine intake is also available.

Maintenance is Simple

No special skills or tools are required to change the filter. Servicing is quick and clean. The long, effective life of the DynaCell reduces maintenance, a special advantage in remote installations.

SuperClone Pre-Cleaner

For heavy and extra-heavy duty service, the SuperClone Pre-Cleaner is recommended. SuperClone removes most of the airborne dust prior to it reaching the DynaCell filter, extending the systems useful service life.



Three models available:

1. Gravity discharge (for heavy service)
2. Exhaust aspirated
3. Positive pressure aspirated

For applications requiring heavy service, exhaust aspirated or positive pressure aspirated versions are recommended.


DynaCell® Series

Heavy Duty Single and Multi-Stage Air Cleaners


- Designed originally as a low-profile under-hood engine air cleaner for frontal air intake systems on highway trucks, the DynaCell is now used in a variety of applications where a low-profile and high-efficiency are required.

- Applications include off-highway and logging trucks, agricultural tractors and motor graders, construction, and mining equipment. Severe service applications include large scrapers, rock drills, cranes, shovels, and low-speed track-type tractors.

- Your choice of two-stage or three-stage primary DynaCell filters, SuperClone Precleaners, and a third-stage safety filter is also available. The pleated paper safety filter is housed in a deeper plenum pan than the two-stage model and provides the ultimate protection.

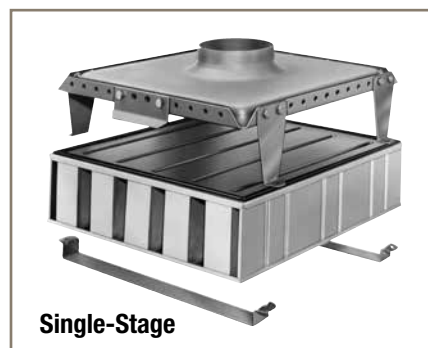

Single-Stage

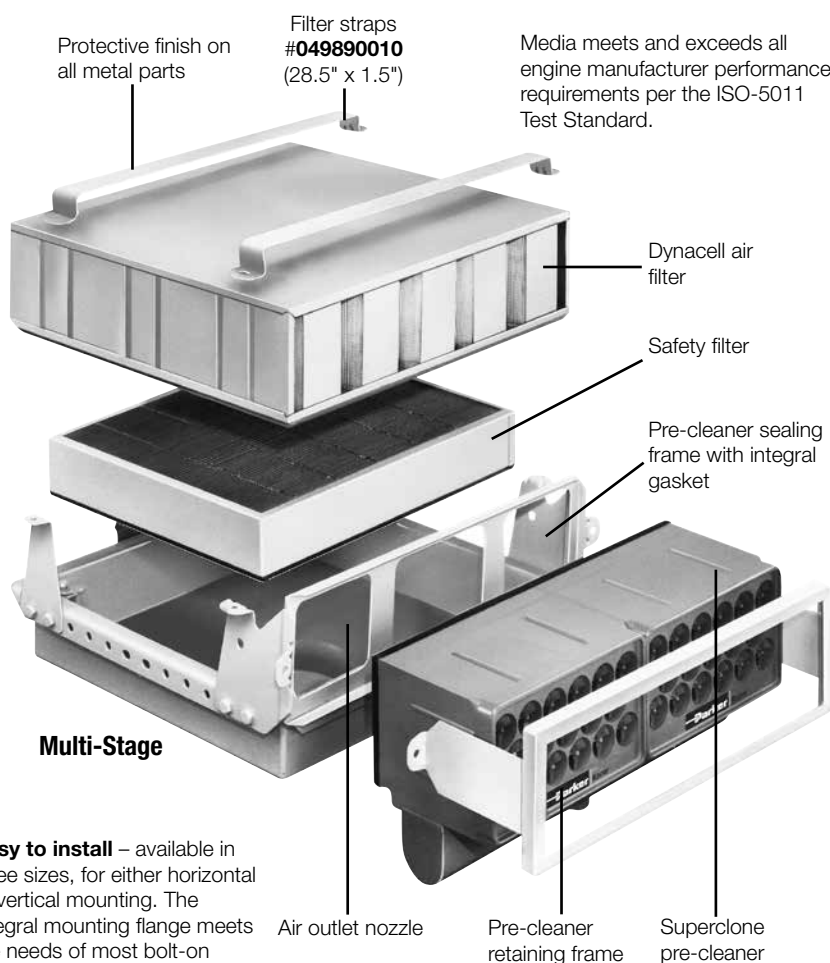

Easy to install – available in three sizes, for either horizontal or vertical mounting. The integral mounting flange meets the needs of most bolt-on applications. A wide selection of flexible fittings, clamps, and couplings to connect the air cleaner to the engine intake are also available.


Air outlet nozzle

Pre-cleaner retaining frame

Superclone pre-cleaner


No special tools are required to change the filter. Servicing is quick and clean.

Positive Pressure Drain Systems

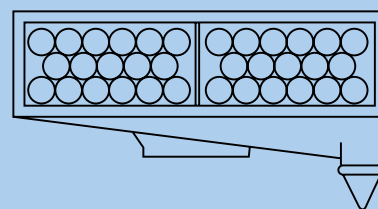

Heavy Service Gravity Discharge

The gravity discharge SuperClone is the easiest to install. No additional ducting or pressure lines are required. Media meets and exceeds all engine manufacturer performance requirements per the ISO-5011 Test Standard

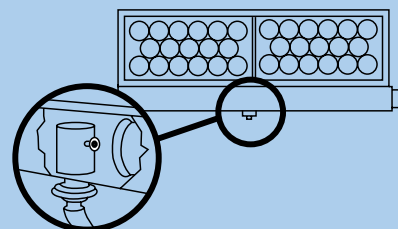

Extra-Heavy Service Positive Pressure Aspirated

The positive pressure SuperClone is designed for the heaviest dirt concentrations. Aspirator uses compressed air from engine air intake manifold, air box, or air compressor receiver tank. Air pressures from 4-100 psig are suitable for aspirator and filter media meets and exceeds all engine manufacturer performance requirements per the ISO-5011 Test Standard.

Standard Dynacell (continued on next page)

| Part No. | Type | Orientation | Primary Filter | Safety Filter | Outlet Size | Max Flow | Width | Height | Weight |
|------------|--------------|-------------|----------------|---------------|----------------------|--------------------------|-----------------------|-----------------------|-----------------------|
| 058447000 | T-512 Series | Horizontal | 049261000 | - | 5.0 in. (12.7 cm) | 600 CFM (17.0 m³/min) | 11.7 in. (29.7 cm) | 8.1 in. (20.6 cm) | 19.0 lbs (8.6 kg) |
| 060039000 | | | | 060236000 | | 550 CFM (15.6 m³/min) | 11.7 in. (29.7 cm) | 9.5 in. (24.1 cm) | 25.5 lbs (11.6 kg) |
| 058447000 | | Vertical | | - | | 600 CFM (17.0 m³/min) | 8.1 in. (20.6 cm) | 11.7 in. (29.7 cm) | 19.0 lbs (8.6 kg) |
| 060039000* | | | | 060236000 | | 550 CFM (15.6 m³/min) | 9.5 in. (24.1 cm) | 11.7 in. (29.7 cm) | 25.5 lbs (11.6 ka) |

*For special order call Racor.

Standard Dynacell (continued)

| Part No. | Type | Orientation | Primary Filter | Safety Filter | Outlet Size | Max Flow | Width | Height | Weight |
|-----------|--------------|-------------|----------------|---------------|----------------------|----------------------------|-----------------------|-----------------------|------------------------|
| 060144000 | T-519 Series | Horizontal | 045800000 | - | 6.0 in. (15.2 cm) | 1,100 CFM (31.1 m³/min) | 19.2 in. (48.8 cm) | 8.6 in. (21.8 cm) | 53.0 lbs (24.0 kg) |
| 060040000 | | | | 060237000 | | 1,050 CFM (29.7 m³/min) | 19.2 in. (48.8 cm) | 11.0 in. (27.9 cm) | 58.5 lbs (26.5 kg) |
| 060144000 | | Vertical | | - | | 1,100 CFM (31.1 m³/min) | 8.6 in. (21.8 cm) | 19.2 in. (48.8 cm) | 53.0 lbs (24.0 kg) |
| 060040000 | | | | 060237000 | | 1,050 CFM (29.7 m³/min) | 11.0 in. (27.9 cm) | 19.2 in. (48.8 cm) | 58.5 lbs (26.5 kg) |
| 060146000 | T-528 Series | Horizontal | 051800000 | - | 7.0 in. (17.8 cm) | 1,600 CFM (45.3 m³/min) | 28.7 in. (72.9 cm) | 8.6 in. (21.8 cm) | 72.0 lbs (32.7 kg) |
| 060147000 | | | | 060238000 | | 1,500 CFM (42.5 m³/min) | 28.7 in. (72.9 cm) | 11.0 in. (27.9 cm) | 106.0 lbs (48.1 kg) |
| 060146000 | | Vertical | | - | | 1,600 CFM (45.3 m³/min) | 8.6 in. (21.8 cm) | 28.7 in. (72.9 cm) | 72.0 lbs (32.7 kg) |
| 060147000 | | | | 060238000 | | 1,500 CFM (42.5 m³/min) | 11.0 in. (27.9 cm) | 28.7 in. (72.9 cm) | 106.0 lbs (48.1 kg) |

Gravity Discharge Dynacell

| | | | | | | | | | |
|------------|--------------|------------|-----------|-----------|----------------------|----------------------------|-----------------------|-----------------------|------------------------|
| 066386002 | T-512 Series | Horizontal | 049261000 | - | 5.0 in. (12.7 cm) | 425 CFM (12.0 m³/min) | 11.7 in. (29.7 cm) | 11.3 in. (28.7 cm) | 55.0 lbs (24.9 kg) |
| 066386003 | | | | 060236000 | | 425 CFM (12.0 m³/min) | 11.7 in. (29.7 cm) | 11.3 in. (28.7 cm) | 60.5 lbs (27.4 kg) |
| 066401002* | | Vertical | | - | | 425 CFM (12.0 m³/min) | 11.3 in. (28.7 cm) | 11.7 in. (29.7 cm) | 55.0 lbs (24.9 kg) |
| 066401003* | | | | 060236000 | | 425 CFM (12.0 m³/min) | 11.3 in. (28.7 cm) | 11.7 in. (29.7 cm) | 60.5 lbs (27.4 kg) |
| 066386005 | T-519 Series | Horizontal | 045800000 | - | 6.0 in. (15.2 cm) | 850 CFM (24.1 m³/min) | 19.2 in. (48.8 cm) | 11.2 in. (28.4 cm) | 53.0 lbs (24.0 kg) |
| 066386006 | | | | 060237000 | | 850 CFM (24.1 m³/min) | 19.2 in. (48.8 cm) | 11.2 in. (28.4 cm) | 60.5 lbs (27.4 kg) |
| 066401005 | | Vertical | | - | | 850 CFM (24.1 m³/min) | 11.2 in. (28.4 cm) | 19.2 in. (48.8 cm) | 53.0 lbs (24.0 kg) |
| 066401006 | | | | 060237000 | | 850 CFM (24.1 m³/min) | 11.2 in. (28.4 cm) | 19.2 in. (48.8 cm) | 60.5 lbs (27.4 kg) |
| 066386008 | T-528 Series | Horizontal | 051800000 | - | 7.0 in. (17.8 cm) | 1,275 CFM (36.1 m³/min) | 28.7 in. (72.9 cm) | 11.2 in. (28.4 cm) | 72.0 lbs (32.7 kg) |
| 066386009 | | | | 060238000 | | 1,275 CFM (36.1 m³/min) | 28.7 in. (72.9 cm) | 11.2 in. (28.4 cm) | 106.0 lbs (48.1 kg) |

Positive Pressure Discharge Dynacell


| | | | | | | | | | |
|------------|--------------|------------|-----------|-----------|----------------------|----------------------------|-----------------------|-----------------------|------------------------|
| 066417002 | T-512 Series | Horizontal | 049261000 | - | 5.0 in. (12.7 cm) | 640 CFM (18.1 m³/min) | 11.7 in. (29.7 cm) | 8.1 in. (20.6 cm) | 55.0 lbs (24.9 kg) |
| 066417003 | | | | 060236000 | | 640 CFM (18.1 m³/min) | 11.7 in. (29.7 cm) | 9.7 in. (24.6 cm) | 60.5 lbs (27.4 kg) |
| 066430002* | | Vertical | | - | | 640 CFM (18.1 m³/min) | 8.1 in. (20.6 cm) | 11.7 in. (29.7 cm) | 55.0 lbs (24.9 kg) |
| 066430003* | | | | 060236000 | | 640 CFM (18.1 m³/min) | 9.5 in. (24.1 cm) | 11.7 in. (29.7 cm) | 60.5 lbs (27.4 kg) |
| 066417005 | T-519 Series | Horizontal | 045800000 | - | 6.0 in. (15.2 cm) | 980 CFM (27.8 m³/min) | 19.2 in. (48.8 cm) | 8.7 in. (22.1 cm) | 52.0 lbs (23.6 kg) |
| 066417006 | | | | 060237000 | | 980 CFM (27.8 m³/min) | 19.2 in. (48.8 cm) | 11.0 in. (27.9 cm) | 60.5 lbs (27.4 kg) |
| 066430005* | | Vertical | | - | | 980 CFM (27.8 m³/min) | 8.6 in. (21.8 cm) | 19.2 in. (48.8 cm) | 52.0 lbs (23.6 kg) |
| 066430006* | | | | 060237000 | | 980 CFM (27.8 m³/min) | 11.0 in. (27.9 cm) | 19.2 in. (48.8 cm) | 58.5 lbs (26.5 kg) |
| 066417008 | T-528 Series | Horizontal | 051800000 | - | 7.0 in. (17.8 cm) | 1,470 CFM (41.6 m³/min) | 28.7 in. (72.9 cm) | 8.6 in. (21.8 cm) | 72.0 lbs (32.7 kg) |
| 066417009 | | | | 060238000 | | 1,470 CFM (41.6 m³/min) | 28.7 in. (72.9 cm) | 11.0 in. (27.9 cm) | 106.0 lbs (48.1 kg) |
| 066430009* | | Vertical | | 060238000 | | 1,470 CFM (41.6 m³/min) | 11.0 in. (27.9 cm) | 28.7 in. (72.9 cm) | 106.0 lbs (48.1 kg) |

*For special order call Racor.

AFSF Series

Heavy-Duty Standard Air Filters

For On-Highway and Stationary Applications

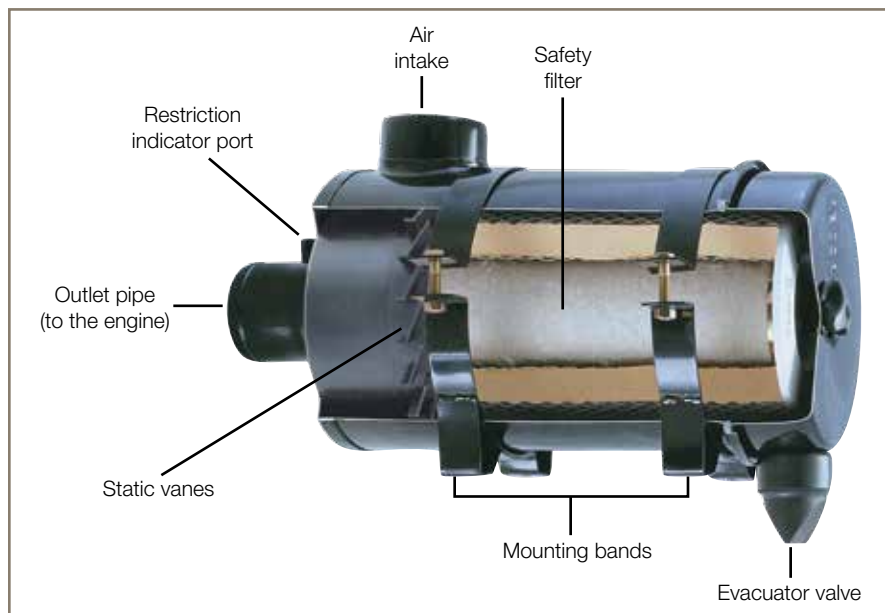

Applications

Racor Standard Air Filters are designed to be connected to the air intake of the gasoline or diesel engine.

Applications include:

- Agricultural machinery
- Earth-moving equipment
- Stationary engines and generator sets
- Trucks, buses and recreational vehicles
- Material handling equipment
- Snow removal equipment
- Street sweepers

How they work

Air flows through static vanes (plastic or metal) which causes the air to spin. Centrifugal force separates the heaviest impurities (dust, dirt, insects and other debris) from the air stream. These contaminants are discharged automatically through an integral evacuator valve. Only purified air flows to the air filters (primary and safety stages of filtration).

| Model | Airflow Range | Horsepower Range | Weight (with filters) | Length | Diameter | Inlet Size | Outlet Size | Primary Filter | Safety Filter |
|----------------|---|----------------------------------|-----------------------|-----------------------|-----------------------|----------------------|----------------------|----------------|---------------|
| AFSF4 | 53 to 159 cfm (1.5 to 4.5 m ³ /min) | 30 to 80 HP (22 to 60 KW) | 8.4 lbs (3.8 kg) | 15.2 in. (38.6 cm) | 6.6 in. (16.8 cm) | 2.5 in. (6.4 cm) | 2.5 in. (6.4 cm) | AR6060 | AS6121 |
| AFSF6 | 159 to 212 cfm (4.5 to 6.0 m ³ /min) | 80 to 90 HP (60 to 67 KW) | 10.8 lbs (4.9 kg) | 16.7 in. (42.4 cm) | 7.8 in. (19.8 cm) | 3.0 in. (7.6 cm) | 2.8 in. (7.1 cm) | AR6122 | AS6123 |
| AFSF8 | 212 to 282 cfm (6.0 to 8.0 m ³ /min) | 90 to 120 HP (67 to 90 KW) | 11.7 lbs (5.3 kg) | 17.5 in. (44.5 cm) | 8.5 in. (21.6 cm) | 3.0 in. (7.6 cm) | 3.0 in. (7.6 cm) | AR6144 | AS6180 |
| AFSF12 | 282 to 423 cfm (8.0 to 12.0 m ³ /min) | 120 to 160 HP (90 to 119 KW) | 16.5 lbs (7.5 kg) | 18.8 in. (47.8 cm) | 10.0 in. (25.4 cm) | 4.0 in. (10.2 cm) | 4.0 in. (10.2 cm) | AR6067 | AS6159 |
| AFSF15 | 423 to 529 cfm (12.0 to 15.0 m ³ /min) | 160 to 180 HP (119 to 134 KW) | 21.9 lbs (9.9 kg) | 19.3 in. (49.0 cm) | 10.5 in. (26.7 cm) | 4.0 in. (10.2 cm) | 4.0 in. (10.2 cm) | AR234401 | AS6182 |
| AFSF18 | 529 to 635 cfm (15.0 to 18.0 m ³ /min) | 180 to 210 HP (134 to 157 KW) | 27.6 lbs (12.5 kg) | 22.0 in. (55.9 cm) | 11.4 in. (29.0 cm) | 4.5 in. (11.4 cm) | 4.0 in. (10.2 cm) | AR6321 | AS6320 |
| AFSF20 | 635 to 706 cfm (18.0 to 20.0 m ³ /min) | 210 to 250 HP (157 to 186 KW) | 31.1 lbs (14.1 kg) | 21.3 in. (54.1 cm) | 12.6 in. (32.0 cm) | 5.3 in. (13.5 cm) | 5.3 in. (13.5 cm) | AR6277 | AS6316 |
| AFSF21 | 706 to 741 cfm (20.0 to 21.0 m ³ /min) | 240 to 280 HP (179 to 209 KW) | 33.9 lbs (15.4 kg) | 24.1 in. (61.2 cm) | 12.6 in. (32.0 cm) | 5.3 in. (13.5 cm) | 5.1 in. (13.0 cm) | AR246501 | AS6220 |
| AFSF310 | 741 to 988 cfm (21.0 to 28.0 m ³ /min) | 280 to 320 HP (209 to 239 KW) | 40.0 lbs (18.1 kg) | 23.5 in. (59.7 cm) | 15.4 in. (39.1 cm) | 6.0 in. (15.2 cm) | 6.0 in. (15.2 cm) | AR6154 | AS6221 |
| AFSF430 | 988 to 1517 cfm (28.0 to 43.0 m ³ /min) | 320 to 450 HP (329 to 336 KW) | 78.7 lbs (35.7 kg) | 28.9 in. (73.4 cm) | 18.0 in. (45.7 cm) | 6.0 in. (15.2 cm) | 6.0 in. (15.2 cm) | AR6324 | AS6323 |

Applications

Combination Dynamic Pre-Cleaner/Air Filters are specifically designed to be connected to the air intake of gasoline and diesel engines. The advantages of the systems include their compact size and ease of installation.

Applications include:


- Agricultural machinery
- Earth moving, construction, and mining equipment
- Stationary engines, generator sets
- Trucks, off-road pick-ups
- Material handling equipment
- Snow removal equipment
- Street sweepers

Features and Benefits

- Pre-Cleaners remove up to 90% of impurities
- Reduces down time
- Prolongs engine, filter, and turbocharger life
- Saves on fuel costs
- Safety filter is standard in most models

AFCS Series

Heavy-Duty Combination Pre-Cleaners

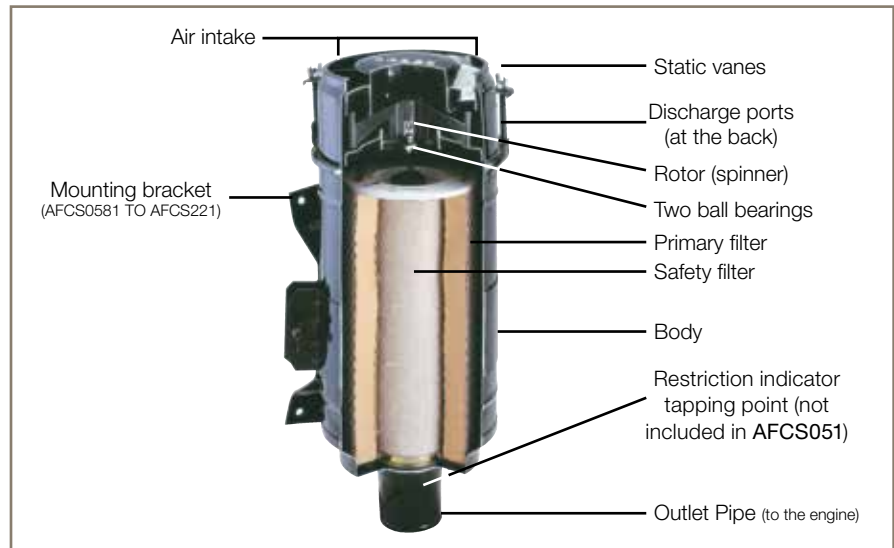


| Model | Airflow Range | Horsepower Range | Weight (with filters) | Length | Diameter | Outlet Size | Primary Filter | Safety Filter |
|---------|--|----------------------------------|-----------------------|-----------------------|-----------------------|----------------------|----------------|---------------|
| AFCS021 | 53 to 88 cfm (1.5 to 2.5 m ³ /min) | 50 HP (37 KW) | 5.7 lbs (2.6 kg) | 13.2 in. (33.5 cm) | 6.2 in. (15.7 cm) | 1.6 in. (4.1 cm) | E028 | N/A |
| AFCS031 | 88 to 124 cfm (2.5 to 3.5 m ³ /min) | 70 HP (52 KW) | 7.3 lbs (3.3 kg) | 14.6 in. (37.1 cm) | 6.7 in. (17.0 cm) | 2.3 in. (5.8 cm) | AR6322 | N/A |
| AFCS051 | 53 to 124 cfm (1.5 to 3.5 m ³ /min) | 30 to 70 HP (22 to 52 KW) | 8.6 lbs (3.9 kg) | 15.0 in. (38.1 cm) | 7.4 in. (18.8 cm) | 2.5 in. (6.4 cm) | AR6322 | N/A |
| AFCS071 | 124 to 159 cfm (3.5 to 4.5 m ³ /min) | 50 to 70 HP (37 to 52 KW) | 10.4 lbs (4.7 kg) | 19.3 in. (49.0 cm) | 7.4 in. (18.8 cm) | 2.5 in. (6.4 cm) | AR6060 | AS6121 |
| AFCS081 | 159 to 212 cfm (4.5 to 6.0 m ³ /min) | 70 to 80 HP (52 to 60 KW) | 12.7 lbs (5.8 kg) | 20.5 in. (52.1 cm) | 8.0 in. (20.3 cm) | 2.8 in. (7.1 cm) | AR6122 | AS6123 |
| AFCS121 | 212 to 282 cfm (6.0 to 8.0 m ³ /min) | 80 to 110 HP (60 to 82 KW) | 16.5 lbs (7.5 kg) | 22.2 in. (56.4 cm) | 9.1 in. (23.1 cm) | 3.0 in. (7.6 cm) | AR6144 | AS6180 |
| AFCS181 | 282 to 423 cfm (8.0 to 12.0 m ³ /min) | 110 to 150 HP (82 to 112 KW) | 20.3 lbs (9.2 kg) | 24.3 in. (61.7 cm) | 10.0 in. (25.4 cm) | 4.0 in. (10.2 cm) | AR6067 | AS6159 |
| AFCS221 | 423 to 529 cfm (12.0 to 15.0 m ³ /min) | 150 to 180 HP (112 to 135 KW) | 24.2 lbs (11.0 kg) | 25.5 in. (64.8 cm) | 11.3 in. (28.7 cm) | 4.0 in. (10.2 cm) | AR234401 | AS6182 |
| AFCS251 | 529 to 706 cfm (15.0 to 20.0 m ³ /min) | 180 to 240 HP (135 to 179 KW) | 30.0 lbs (13.6 kg) | 28.1 in. (71.4 cm) | 13.3 in. (33.8 cm) | 5.3 in. (13.5 cm) | AR6277 | AS6316 |
| AFCS261 | 706 to 741 cfm (20.0 to 21.0 m ³ /min) | 200 to 260 HP (149 to 194 KW) | 31.9 lbs (14.5 kg) | 30.7 in. (78.0 cm) | 13.3 in. (33.8 cm) | 5.1 in. (13.0 cm) | AR246501 | AS6220 |
| AFCS311 | 741 to 988 cfm (21.0 to 28.0 m ³ /min) | 260 to 320 HP (194 to 239 KW) | 36.8 lbs (16.7 kg) | 30.6 in. (77.7 cm) | 14.5 in. (36.8 cm) | 6.0 in. (15.2 cm) | AR6154 | AS6221 |
| AFCS351 | 988 to 1235 cfm (28.0 to 35.0 m ³ /min) | 320 to 380 HP (239 to 283 KW) | 49.3 lbs (22.4 kg) | 30.6 in. (77.7 cm) | 16.1 in. (40.9 cm) | 6.0 in. (15.2 cm) | AR2201 | AS2207 |
| AFCS431 | 1235 to 1517 cfm (35.0 to 43.0 m ³ /min) | 450 HP (336 KW) | 65.2 lbs (29.6 kg) | 37.3 in. (94.7 cm) | 18.4 in. (46.7 cm) | 6.0 in. (15.2 cm) | AR6324 | AS6323 |

AFAP Series

Heavy-Duty Off-Highway Air Pre-Cleaners

For Agriculture, Construction and Stationary Applications

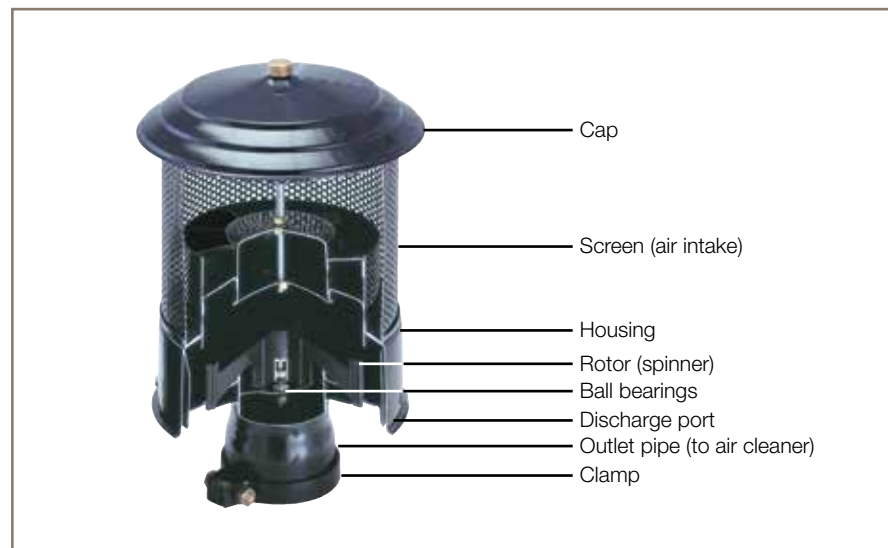

How they work

Engine Air Pre-Cleaners are usually installed in place of the rain cap, dust bowl, or aspirated pre-cleaner (exhaust system). In some applications, they can be mounted directly to the air cleaner.

Air enters the system through a pre-screen that removes large debris. It then flows through static vanes causing the air to spin. As the air spins, centrifugal force separates dust, dirt, insects, rain, and snow from the air stream. The swirling air drives a high velocity rotor that acts as a blower evacuating contaminants through special discharge ports at the bottom or in the side of the unit. Only purified air flows to the air filters.

Applications include:

- Earth moving, construction, and mining equipment
- Pumping plants
- Generator sets
- Snow removal equipment
- Street sweepers

| Model | Flow Rate | Horsepower Range | Weight (with filters) | Height | Diameter | Outlet Size |
|---------|--|----------------------------------|-----------------------|-----------------------|-----------------------|---|
| AFAP083 | 53 to 124 cfm (1.5 to 3.5 m ³ /min) | 30 to 60 HP (22 to 45 KW) | 3.40 lbs (1.6 kg) | 7.7 in. (19.6 cm) | 7.4 in. (18.8 cm) | 3.0"-2.8"-2.5" (7.6-7.1-6.3 cm) |
| AFAP414 | 124 to 247 cfm (3.5 to 7.0 m ³ /min) | 60 to 120 HP (45 to 89 KW) | 5.80 lbs (2.7 kg) | 12.8 in. (32.5 cm) | 8.7 in. (22.1 cm) | 3.3"-3.0"-2.8"-2.5" (8.4-7.6-7.1-6.3 cm) |
| AFAP415 | 124 to 247 cfm (3.5 to 7.0 m ³ /min) | 60 to 120 HP (45 to 89 KW) | 6.30 lbs (2.9 kg) | 13.7 in. (34.8 cm) | 8.7 in. (22.1 cm) | 4.0"-3.8"-3.5"-3.3" (10.2-9.7-8.9-8.4 cm) |
| AFAP818 | 247 to 388 cfm (7.0 to 11.0 m ³ /min) | 120 to 160 HP (89 to 119 KW) | 7.70 lbs (3.5 kg) | 13.5 in. (34.3 cm) | 10.8 in. (27.4 cm) | 3.3"-3.0"-2.8"-2.5" (8.4-7.6-7.1-6.3 cm) |
| AFAP819 | 247 to 388 cfm (7.0 to 11.0 m ³ /min) | 120 to 160 HP (89 to 119 KW) | 7.80 lbs (3.6 kg) | 14.0 in. (35.6 cm) | 10.8 in. (27.4 cm) | 4.0"-3.8"-3.5"-3.3" (10.2-9.7-8.9-8.4 cm) |
| AFAP820 | 247 to 388 cfm (7.0 to 11.0 m ³ /min) | 120 to 160 HP (89 to 119 KW) | 8.15 lbs (3.7 kg) | 13.9 in. (35.3 cm) | 10.8 in. (27.1 cm) | 4.5"-4.3"-4.0"-3.8" (11.4-10.9-10.2-9.5 cm) |
| AFAP919 | 388 to 530 cfm (11.0 to 15.0 m ³ /min) | 160 to 220 HP (119 to 164 KW) | 9.70 lbs (4.4 kg) | 14.0 in. (35.6 cm) | 12.4 in. (31.6 cm) | 4.5"-4.3"-4.0"-3.8" (11.4-10.9-10.2-9.5 cm) |
| AFAP920 | 388 to 530 cfm (11.0 to 15.0 m ³ /min) | 160 to 220 HP (119 to 164 KW) | 10.10 lbs (4.6 kg) | 14.6 in. (37.1 cm) | 12.4 in. (31.5 cm) | 5.3"-5.0"-4.8"-4.5" (13.5-12.7-12.2-11.4 cm) |
| AFAP183 | 530 to 776 cfm (15.0 to 22.0 m ³ /min) | 220 to 300 HP (164 to 225 KW) | 12.7 lbs (5.8 kg) | 16.1 in. (40.9 cm) | 13.9 in. (35.3 cm) | 5.3"-5.0"-4.8"-4.5" (13.5-12.7-12.2-11.4 cm) |
| AFAP184 | 530 to 776 cfm (15.0 to 22.0 m ³ /min) | 220 to 300 HP (165 to 224 KW) | 12.8 lbs (5.8 kg) | 16.1 in. (40.9 cm) | 13.9 in. (35.3 cm) | 6.0"-5.5"-5.3"-5.0" (15.2-14.0-13.5-12.7 cm) |
| AFAP400 | 776 to 1059 cfm (22.0 to 30.0 m ³ /min) | 300 to 400 HP (224 to 298 KW) | 16.5 lbs (7.5 kg) | 18.1 in. (46.0 cm) | 16.7 in. (42.4 cm) | 6.0"-5.5"-5.3"-5.0" (15.2-14.0-13.5-12.7 cm) |
| AFAP401 | 776 to 1059 cfm (22.0 to 30.0 m ³ /min) | 300 to 400 HP (224 to 298 KW) | 16.1 lbs (7.3 kg) | 18.1 in. (46.0 cm) | 16.7 in. (42.4 cm) | 7.0"-6.8"-6.5"-6.3" (17.8-17.3-16.5-16.0 cm) |
| AFAP500 | 1059 to 1411 cfm (30.0 to 40.0 m ³ /min) | 400 to 550 HP (298 to 410 KW) | 20.9 lbs (9.5 kg) | 18.5 in. (47.0 cm) | 18.9 in. (48.0 cm) | 7.0"-6.8"-6.5"-6.3" (17.8-17.3-16.5-16.0 cm) |

Applications:

Racor Engine Air Pre-Cleaners are designed to be mounted on or connected to the air filter intake of a gasoline or diesel engine air cleaner.

Applications include:


- All fast-moving mobile equipment such as trucks, buses, and recreational vehicles.

Features and Benefits

- Removes up to 80% of impurities from intake air before the air enters the filters.
- The bottom-intake air entry design eliminates the opportunity for water intrusion during high-speed and stationary operation.
- Easy to install. Three plastic outlet reduction sleeves are provided with each assembly.

AFHP Series


Heavy-Duty On-Highway Pre-Cleaners For Mobile Equipment Applications

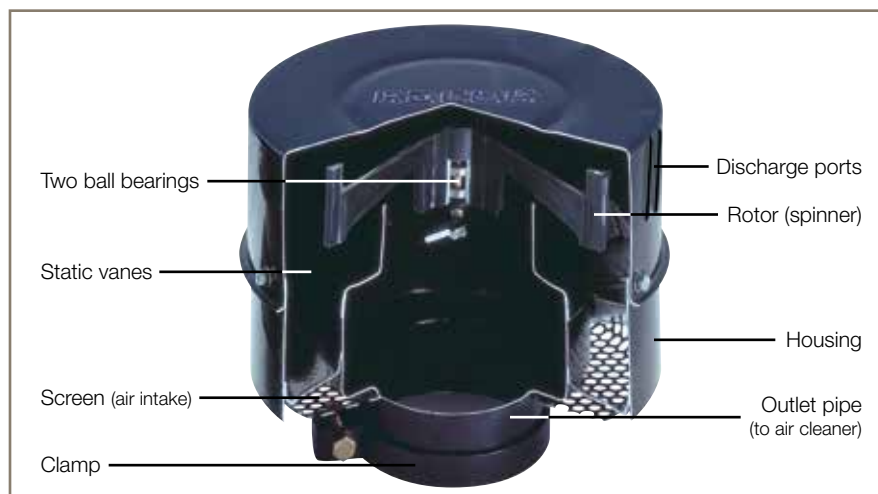

| Model | Airflow Range | Horsepower Range | Weight (with filters) | Height | Diameter | Outlet Size | Outlet Reducer Size |
|---------|---|-------------------------------|-----------------------|--------------------|--------------------|-------------------|------------------------------------|
| AFHP21 | 53 cfm (1.5 m ³ /min) | 30 HP (22 KW) | 1.3 lbs (0.6 kg) | 4.0 in. (10.2 cm) | 5.2 in. (3.2 cm) | 2.0 in. (5.1 cm) | 2.0" (5.1 cm) |
| AFHP31 | 53 to 124 cfm (1.5 to 3.5 m ³ /min) | 30 to 60 HP (22 to 45 KW) | 2.4 lbs (1.1 kg) | 6.1 in. (15.5 cm) | 7.0 in. (17.8 cm) | 3.0 in. (7.6 cm) | 2.8"-2.5" (7.1-6.4 cm) |
| AFHP41 | 124 to 247 cfm (3.5 to 7.0 m ³ /min) | 60 to 120 HP (45 to 89 KW) | 3.4 lbs (1.5 kg) | 7.0 in. (17.8 cm) | 7.8 in. (19.8 cm) | 3.0 in. (7.6 cm) | 2.5"-2.8" (6.4 -7.1cm) |
| AFHP42 | 124 to 247 cfm (3.5 to 7.0 m ³ /min) | 60 to 120 HP (45 to 89 KW) | 3.5 lbs (1.6 kg) | 7.0 in. (17.8 cm) | 7.8 in. (19.8 cm) | 4.0 in. (10.2 cm) | 3.8"-3.5"-3.3" (9.7-8.9-8.4 cm) |
| AFHP81 | 247 to 388 cfm (7.0 to 11.0 m ³ /min) | 120 to 160 HP (89 to 119 KW) | 4.2 lbs (1.9 kg) | 7.8 in. (19.8 cm) | 9.6 in. (24.4 cm) | 3.3 in. (8.4 cm) | 3.0"-2.8"-2.5" (7.6-7.1-6.4 cm) |
| AFHP82 | 247 to 388 cfm (7.0 to 11.0 m ³ /min) | 120 to 160 HP (89 to 119 KW) | 4.3 lbs (2.0 kg) | 7.8 in. (19.8 cm) | 9.6 in. (24.4 cm) | 4.0 in. (10.2 cm) | 3.8"-3.5"-3.3" (9.7-8.9-8.4 cm) |
| AFHP83 | 247 to 388 cfm (7.0 to 11.0 m ³ /min) | 120 to 160 HP (89 to 119 KW) | 4.4 lbs (2.0 kg) | 7.8 in. (19.8 cm) | 9.6 in. (24.4 cm) | 4.5 in. (11.4 cm) | 4.3"-4.0"-3.8" (10.9-10.2-9.7cm) |
| AFHP91 | 388 to 530 cfm (11.0 to 15.0 m ³ /min) | 160 to 220 HP (119 to 164 KW) | 5.2 lbs (2.4 kg) | 8.2 in. (20.8 cm) | 11.0 in. (27.9 cm) | 4.5 in. (11.4 cm) | 4.3"-4.0"-3.8" (1.9-10.2-9.7 cm) |
| AFHP92 | 388 to 530 cfm (11.0 to 15.0 m ³ /min) | 220 to 300 HP (164 to 224 KW) | 5.5 lbs (2.5 kg) | 8.2 in. (20.8 cm) | 11.0 in. (27.9 cm) | 5.3 in. (13.5 cm) | 5.0"-4.8"-4.5" (12.7-12.2-11.4 cm) |
| AFHP111 | 530 to 776 cfm (15.0 to 22.0 m ³ /min) | 220 to 300 HP (164 to 224 KW) | 6.5 lbs (2.9 kg) | 8.4 in. (21.3 cm) | 12.2 in. (31.0 cm) | 5.3 in. (13.5 cm) | 5.0"-4.8"-4.5" (12.7-12.2-11.4 cm) |
| AFHP112 | 530 to 776 cfm (15.0 to 22.0 m ³ /min) | 220 to 300 HP (164 to 224 KW) | 6.6 lbs (3.0 kg) | 8.4 in. (21.3 cm) | 12.2 in. (31.0 cm) | 6.0 in. (15.2 cm) | 5.5"-5.3"-5.0" (14.0-13.5-12.7 cm) |
| AFHP211 | 776 to 1059 cfm (22.0 to 30.0 m ³ /min) | 300 to 400 HP (224 to 298 KW) | 8.4 lbs (3.8 kg) | 9.1 in. (23.1 cm) | 14.1 in. (35.8 cm) | 6.0 in. (15.2 cm) | 5.5"-5.3"-5.0" (14.0-13.5-12.7 cm) |
| AFHP212 | 776 to 1059 cfm (22.0 to 30.0 m ³ /min) | 300 to 400 HP (224 to 298 KW) | 8.8 lbs (4.0 kg) | 9.1 in. (23.1 cm) | 14.1 in. (35.8 cm) | 7.0 in. (17.8 cm) | 6.8"-6.5"-6.3" (17.3-16.5-16.0 cm) |
| AFHP411 | 1059 to 1411 cfm (30.0 to 40.0 m ³ /min) | 400 to 550 HP (298 to 410 KW) | 12.0 lbs (5.4 kg) | 10.4 in. (26.4 cm) | 17.1 in. (43.4 cm) | 7.0 in. (17.8 cm) | 6.8"-6.5"-6.3" (17.3-16.5-16.0 cm) |
| AFHP412 | 1059 to 1411 cfm (30.0 to 40.0 m ³ /min) | 400 to 550 HP (298 to 410 KW) | 12.4 lbs (5.6 kg) | 10.4 in. (26.4 cm) | 17.1 in. (43.4 cm) | 8.0 in. (20.3 cm) | 8.0" (20.3 cm) |

AFUP Series

On-Highway/Off-Highway Air Pre-Cleaners
For Under-Hood Applications

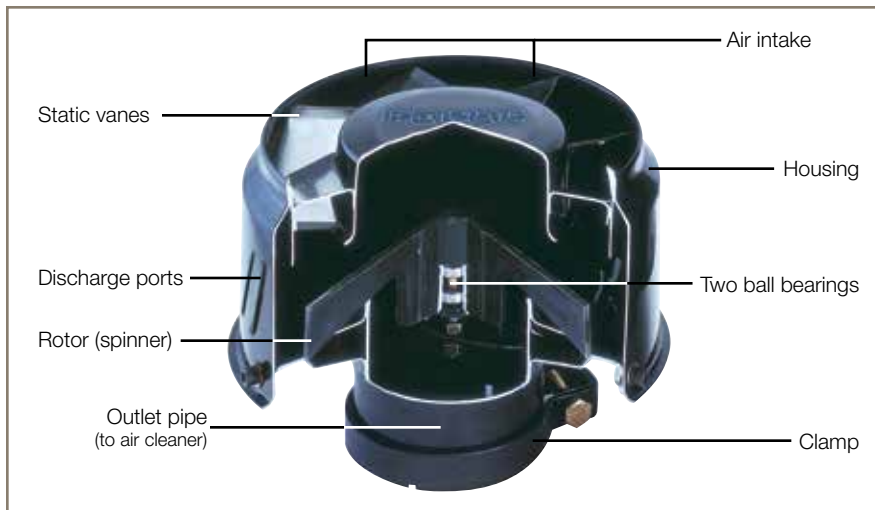

How they work

Racor Under-Hood Engine Air Pre-Cleaners can be remote-mounted or attached directly to the air cleaner eliminating the need for an external air intake.

- **No exterior vehicle modification for intake air.**
- **High air flow, low differential design.**



| Model | Airflow Range | Horsepower Range | Weight (with filters) | Height | Diameter | Outlet Size |
|----------------------|--|----------------------------------|-----------------------|-------------------|--------------------|--|
| AFUP006 ¹ | 53 to 141 cfm (1.5 to 4.0 m ³ /min) | 30 to 60 HP (22 to 45 KW) | 1.8 lbs (0.8 kg) | 4.6 in. (11.7 cm) | 5.6 in. (14.2 cm) | 2.5" O.D. (6.4 cm) |
| AFUP007 | 141 to 176 cfm (4.0 to 5.0 m ³ /min) | 60 to 70 HP (45 to 52 KW) | 2.9 lbs (1.3 kg) | 6.6 in. (15.7 cm) | 7.1 in. (18.0 cm) | 3.0"-2.8"-2.5" (I.D.) (7.6-7.1-6.4 cm) |
| AFUP021 | 176 to 282 cfm (5.0 to 8.0 m ³ /min) | 70 to 100 HP (52 to 75 KW) | 3.5 lbs (1.6 kg) | 5.8 in. (14.7 cm) | 7.9 in. (20.1 cm) | 3.3"-3.0"-2.8"-2.5" (8.4-7.6-7.1-6.4 cm) |
| AFUP041 | 282 to 423 cfm (8.0 to 12.0 m ³ /min) | 100 to 140 HP (75 to 104 KW) | 4.3 lbs (2.0 kg) | 7.1 in. (18.0 cm) | 8.9 in. (22.6 cm) | 4.0"-3.8"-3.5"-3.3" (10.2-9.7-8.9-8.4 cm) |
| AFUP061 | 423 to 635 cfm (12.0 to 18.0 m ³ /min) | 140 to 200 HP (104 to 149 KW) | 5.0 lbs (2.3 kg) | 7.6 in. (19.3 cm) | 9.4 in. (23.9 cm) | 5.3"-5.0"-4.8"-4.5" (I.D.) (13.5-12.7-12.2-11.4 cm) |
| AFUP091 | 635 to 741 cfm (18.0 to 21.0 m ³ /min) | 200 to 300 HP (149 to 224 KW) | 6.6 lbs (3.0 kg) | 8.4 in. (21.3 cm) | 11.0 in. (27.9 cm) | 5.3"-5.0"-4.8"-4.5" I.D. (13.5-12.7-12.2-11.4 cm) |
| AFUP131 | 741 to 988 cfm (21.0 to 28.0 m ³ /min) | 300 to 350 HP (224 to 261 KW) | 8.7 lbs (3.9 kg) | 9.6 in. (24.4 cm) | 13.0 in. (33.0 cm) | 6.0"-5.5"-5.3"-5.0" I.D. (15.2-14.0-13.5-12.7 cm) |

¹Does not include outlet reducing sleeves or rings.

Spinaire Series


Engine Air Precleaners

Spinaire Precleaners

Racor Engine Air Precleaners are designed to be mounted on or connected to the air filter intake of a gasoline or diesel engine air cleaner. Their applications include all on highway and industrial equipment such as agricultural machinery; earth moving, construction and mining equipment; Concrete mixers, Yard tractors; pumping plants; generator sets; material handling equipment; snow removal equipment and street sweepers.

Product Features

- Works for a wide range of applications and flow rates.
- Steel housing, black powder coat.
- High air flow, low restriction design.
- Self-powered and self-cleaning
- Low maintenance



Product Information and Specifications

Racor Spinaire series precleaners are designed to be mounted on or connected to the air filter intake of a gasoline or diesel engine. Applications include all slow moving and industrial equipment such as agricultural machinery, earth moving, construction, mining equipment, pumping plants, generator sets, material handling equipment, snow removal equipment, and street sweepers.

Features and Benefits

Removes up to 90% of impurities from intake air before the air enters the filter. Extends engine air filter life and reduces equipment down time. Also prolongs engine and turbocharger life and saves on fuel costs.

Flow rates from 300 to 1850 CFM, steel housing, black powder coating, and low differential design for a wide range of applications. Spinaire series precleaners are self-powered and self-cleaning, requiring no electrical or exhaust gas power to dispose of separated particles. It requires almost no maintenance and should be inspected occasionally to insure that no foreign material has plugged intake or exhaust port areas.

| Part No. | Air Outlet ID | | Maximum Airflow | | Dimensions | | | | Weight | |
|------------|---------------|------|-----------------|---------------------|------------|------|------|------|--------|-----|
| | C | | CFM | m ³ /min | in. | | cm | | lbs | kg |
| | in. | cm | | | A | B | A | B | | |
| 123583440 | 4.0 | 10.2 | 300 | 8.5 | 4.8 | 8.3 | 12.2 | 21.1 | 5.0 | 2.3 |
| 123583550 | 5.0 | 12.7 | 520 | 14.7 | 7.1 | 10.6 | 18.0 | 26.9 | 8.0 | 3.6 |
| 123583665 | 6.0 | 15.2 | 580 | 16.4 | 7.1 | 10.6 | 18.0 | 26.9 | 8.0 | 3.6 |
| 123583660 | 6.0 | 15.2 | 740 | 21.0 | 7.1 | 12.3 | 18.0 | 31.2 | 9.0 | 4.1 |
| 123583770 | 7.0 | 17.8 | 1190 | 33.7 | 7.3 | 14.1 | 18.5 | 35.8 | 11.0 | 5.0 |
| 123583771* | 7.0 | 17.8 | 1190 | 33.7 | 7.3 | 14.1 | 18.5 | 35.8 | 11.0 | 5.0 |
| 123583990* | 9.0 | 22.9 | 1850 | 52.4 | 8.1 | 17.1 | 20.3 | 43.4 | 14.0 | 6.4 |
| 123583991 | 9.0 | 22.9 | 1850 | 52.4 | 8.1 | 17.1 | 20.3 | 43.4 | 14.0 | 6.4 |

*NOTE: All precleaners are black powder coated. Model 123583990 and 123583771 are polished aluminum.

EACP Series

Composite Dynamic Air Precleaners



EACP Series

Equipment operated in dusty environments require more periodic maintenance and experience more down time. The filter in the air cleaner requires more frequent replacement as the level of dust increases. A plugged filter reduces power, fuel economy, and engine component life. Racor composite dynamic air precleaners dramatically increase the life of the air filter, reduce overall intake system restriction, increase equipment productivity, reduce downtime, and save money.

Product Features

- High efficiency
- Light weight
- Durable
- Rust/corrosion resistant
- UV Resistant
- Sealed bearings
- No maintenance
- Limited Lifetime Warranty


Product Information and Specifications

Racor composite dynamic air precleaners separate solid dust and debris from the air stream before they reach the main air cleaner. They are installed in place of the rain cap, dust bowl, or aspirated precleaner (exhaust system). In some applications, they can be mounted directly to the air cleaner. Air enters through static vanes at the bottom periphery of the precleaner causing the air to spin and drive a high velocity rotor, which in turn acts as a blower that centrifugally forces dust, dirt, insects, water, and snow through a discharge port. Pre-cleaned air then flows through the outlet to the main air cleaner system

and extend the life of the primary air filter from 5 to over 12 times, greatly increasing the air cleaner service interval, reducing operating cost, and increasing equipment uptime.

Racor Composite Precleaners range in size to fit intakes from 1 1/2" to 6" diameter to handle air flows from 3 to 1100 CFM. They have been independently tested and proven superior. Racor Composite Precleaners are constructed with specially formulated materials to withstand heat, cold, vibration, UV Radiation, and impact.

Dimensions

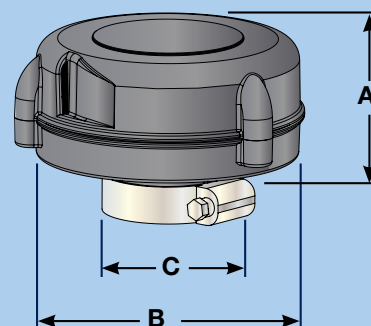

| Part No. | Air Outlet ID | | Airflow | | | | Dimensions | | | | Weight | |
|-----------|---------------|------|---------|------|--------|------|------------|------|------|------|--------|------|
| | C | | cfm | | m³/min | | in. | | cm | | lbs | kg |
| | in. | cm | Min | Max | Min | Max | A | B | A | B | | |
| EACP61508 | 1.5 | 3.8 | 3 | 20 | 0.08 | 0.6 | 2.3 | 3.6 | 5.8 | 9.1 | 0.42 | 0.19 |
| EACP61511 | 2.0 | 5.1 | 20 | 100 | 0.57 | 4.3 | 3.0 | 4.8 | 7.6 | 12.2 | 0.55 | 0.25 |
| EACP61513 | 3.0 | 7.6 | 75 | 250 | 2.1 | 7.1 | 4.0 | 6.9 | 10.1 | 17.5 | 1.5 | 0.68 |
| EACP61515 | 4.0 | 10.1 | 150 | 465 | 4.3 | 13.2 | 5.3 | 9.4 | 13.5 | 23.9 | 2.83 | 1.28 |
| EACP61521 | 4.5 | 11.4 | 250 | 600 | 7.1 | 17.0 | 7.0 | 10.8 | 17.8 | 27.4 | 3.7 | 1.68 |
| EACP61523 | 5.0 | 12.7 | 250 | 600 | 7.1 | 17.0 | 7.0 | 10.8 | 17.8 | 27.4 | 3.7 | 1.68 |
| EACP61519 | 6.0 | 15.2 | 250 | 600 | 7.1 | 17.0 | 7.0 | 10.8 | 17.8 | 27.4 | 3.7 | 1.68 |
| EACP61517 | 6.0 | 15.2 | 350 | 1100 | 9.9 | 31.1 | 6.6 | 12.0 | 16.8 | 30.5 | 5.67 | 2.57 |

EAVLR Series


The VLR incorporates a proven dynamic precleaner and additional static precleaning action into a dual filter canister. They are available with straight or 90 degree outlet, a primary filter only, or with primary and safety filter. They can be mounted horizontally or vertically and rotated in any direction, as long as the dust evacuator valve is pointed downward.

Features

- High efficiency and dust holding capacity
- Durable high strength polymer composite construction
- Rust and corrosion resistant
- UV resistant
- Industry standard radial seal filter
- Intake flow rates from 50 to 700 cfm

EAVLR Series

Composite Very Low Restriction Heavy Duty Air Cleaners

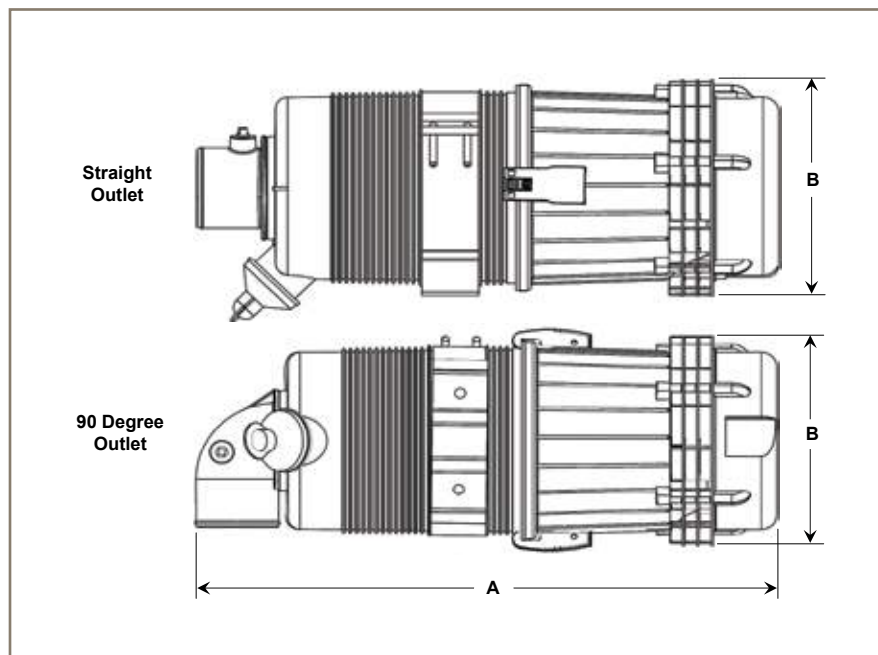

| Part No. | Outlet Type | Safety Element | Initial Restriction | | | | | | Outlet OD | | A | | B | |
|---------------|-------------|----------------|------------------------|--------|------------------------|--------|-------------------------|--------|-----------|------|------|------|------|------|
| | | | 6 in. H ₂ O | | 8 in. H ₂ O | | 10 in. H ₂ O | | | | | | | |
| | | | cfm | m³/min | cfm | m³/min | cfm | m³/min | in. | cm | in. | cm | in. | cm |
| EAVLR68193S | Straight | No | 85 | 2.4 | 102 | 2.9 | 119 | 3.4 | 1.8 | 4.6 | 13.3 | 33.8 | 5.4 | 13.7 |
| EAVLR68193S2 | Straight | Yes | 66 | 1.9 | 78 | 2.2 | 88 | 2.5 | 1.8 | 4.6 | 13.3 | 33.8 | 5.4 | 13.7 |
| EAVLR68193 | 90° | No | 74 | 2.1 | 88 | 2.5 | 98 | 2.8 | 1.8 | 4.6 | 12.6 | 32.0 | 5.4 | 13.7 |
| EAVLR68193-2 | 90° | Yes | 58 | 1.6 | 68 | 1.9 | 88 | 2.5 | 1.8 | 4.6 | 12.6 | 32.0 | 5.4 | 13.7 |
| EAVLR68194 | Straight | No | 100 | 2.8 | 115 | 3.3 | 132 | 3.7 | 2.0 | 5.1 | 19.8 | 50.3 | 6.3 | 16.0 |
| EAVLR68199S | Straight | Yes | 85 | 2.4 | 100 | 2.8 | 114 | 3.2 | 2.0 | 5.1 | 19.8 | 50.3 | 6.3 | 16.0 |
| EAVLR68190 | 90° | No | 82 | 2.3 | 95 | 2.7 | 105 | 3.0 | 2.0 | 5.1 | 18.5 | 47.0 | 6.3 | 16.0 |
| EAVLR68199 | 90° | Yes | 75 | 2.1 | 88 | 2.5 | 97 | 2.7 | 2.0 | 5.1 | 18.5 | 47.0 | 6.3 | 16.0 |
| EAVLR68197S | Straight | No | 178 | 5.0 | 200 | 5.7 | 230 | 6.5 | 2.5 | 6.4 | 21.0 | 53.3 | 6.3 | 16.0 |
| EAVLR68197S2* | Straight | Yes | 162 | 4.6 | 188 | 5.3 | 212 | 6.0 | 2.5 | 6.4 | 21.0 | 53.3 | 6.3 | 16.0 |
| EAVLR68197 | 90° | No | 145 | 4.1 | 170 | 4.8 | 188 | 5.3 | 2.5 | 6.4 | 20.6 | 52.3 | 6.3 | 16.0 |
| EAVLR68197-2* | 90° | Yes | 138 | 3.9 | 161 | 4.6 | 181 | 5.1 | 2.5 | 6.4 | 20.6 | 52.3 | 6.3 | 16.0 |
| EAVLR68195S1* | Straight | No | 182 | 5.2 | 214 | 6.1 | 238 | 6.7 | 3.0 | 7.6 | 20.4 | 51.8 | 8.2 | 20.8 |
| EAVLR68195S | Straight | Yes | 166 | 4.7 | 194 | 5.5 | 222 | 6.3 | 3.0 | 7.6 | 20.4 | 51.8 | 8.2 | 20.8 |
| EAVLR68195-1* | 90° | No | 160 | 4.5 | 185 | 5.2 | 209 | 5.9 | 3.0 | 7.6 | 21.0 | 53.3 | 8.2 | 20.8 |
| EAVLR68195 | 90° | Yes | 150 | 4.2 | 177 | 5.0 | 194 | 5.5 | 3.0 | 7.6 | 21.0 | 53.3 | 8.2 | 20.8 |
| EAVLR68191 | Straight | No | 310 | 8.8 | 360 | 10.2 | 410 | 11.6 | 4.0 | 10.2 | 17.8 | 45.2 | 10.0 | 25.4 |
| EAVLR68198-1 | Straight | No | 510 | 14.4 | 580 | 16.4 | 670 | 19.0 | 5.0 | 12.7 | 32.0 | 81.3 | 14.3 | 36.3 |
| EAVLR68189-2* | Straight | Yes | 475 | 13.5 | 550 | 15.6 | 625 | 17.7 | 5.0 | 12.7 | 32.0 | 81.3 | 14.3 | 36.3 |
| EAVLR68198 | Straight | No | 520 | 14.7 | 650 | 18.4 | 730 | 20.7 | 6.0 | 15.2 | 32.0 | 81.3 | 14.3 | 36.3 |
| EAVLR68196-3* | Straight | Yes | 510 | 14.4 | 600 | 17.0 | 675 | 19.1 | 6.0 | 15.2 | 32.0 | 81.3 | 14.3 | 36.3 |

*For special order call Racor.

EAVLR Replacement Filters

Composite Very Low Restriction Heavy Duty Air Cleaners



| Part No. | Primary | Safety |
|---------------|--------------|--------------|
| EAVLR68193S | EAPE68300 | N/A |
| EAVLR68193S2 | EAPE68300 | EASE68340 |
| EAVLR68193 | EAPE68300 | N/A |
| EAVLR68193-2 | EAPE68300 | EASE68340 |
| EAVLR68194 | EAPE68310 | N/A |
| EAVLR68199S | EAPE68310 | EASE68350 |
| EAVLR68190 | EAPE68310 | N/A |
| EAVLR68199 | EAPE68310 | EASE68350 |
| EAVLR68197S | EAPE68320 | N/A |
| EAVLR68197S2* | EAPE68320 | EASE68360 |
| EAVLR68197 | EAPE68320 | N/A |
| EAVLR68197-2* | EAPE68320 | EASE68360 |
| EAVLR68195S1 | EAPE68320 | EASE68360 |
| EAVLR68195S | EAPE68320 | EASE68360 |
| EAVLR68195-1* | EAPE68320 | N/A |
| EAVLR68195 | EAPE68320 | EASE68360 |
| EAVLR68191 | EAPE68191* | N/A |
| EAVLR68198-1 | EAPE68410-1* | N/A |
| EAVLR68189-2* | EAPE68410-1* | EASE68410-2* |
| EAVLR68198 | EAPE68410-1* | N/A |
| EAVLR68196-3* | EAPE68410-1* | EASE68410-2* |

*For special order call Racor.

EAF Series


Heavy duty equipment requires heavy duty engine air intake filtration. Heavy duty composite air cleaners are designed and built to meet the requirements for gasoline and diesel powered agricultural, construction, turf care, forestry, and mining equipment. Designed for high dust environments with excessive vibration and extreme temperatures. Composite air cleaners are the economical choice for your heavy duty applications.

Features

- High efficiency dust holding capacity
- UV resistant high-strength polymer composite
- Tool-less service
- Working temperature -40°C to 100°C (-40°F to 212°F)
- Industry standard radial seal filter
- Mounted vertically or horizontally
- Spring loaded mounting bracket
- Dual position restriction indicator port mounting

EAF Series

Composite Heavy Duty Air Cleaners

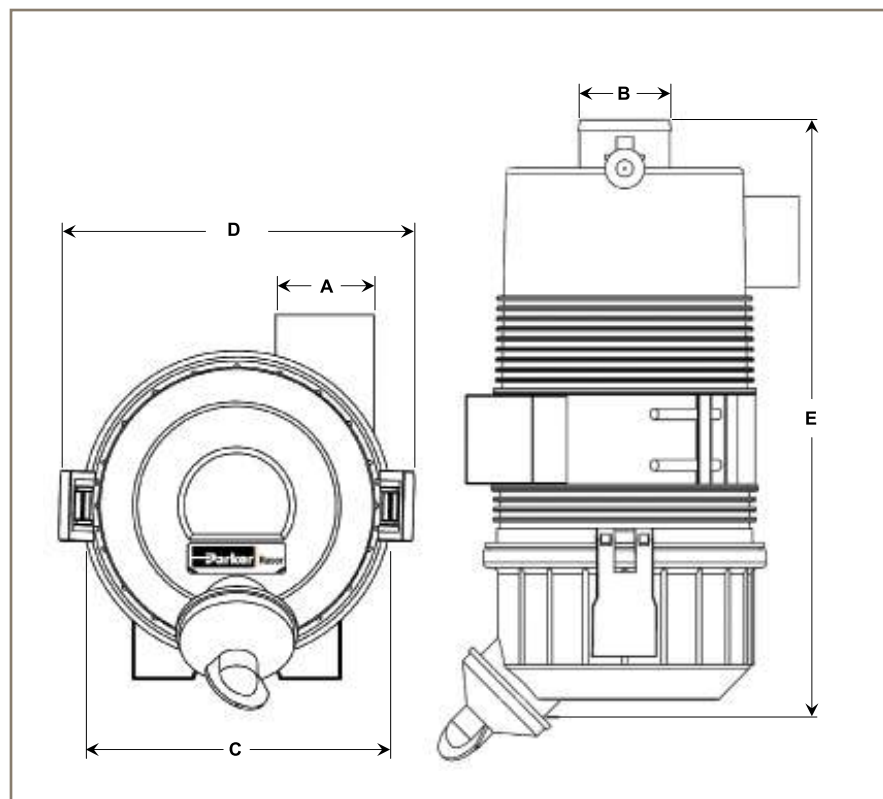

| Part No. | Safety Element | Flow Rate at Initial Restriction | | | | | | A | | B | | C | | D | | E | |
|------------|----------------|----------------------------------|--------|------------------------|--------|-------------------------|--------|------------|------|-------------|------|------|------|------|------|------|------|
| | | 6 in. H ₂ O | | 8 in. H ₂ O | | 10 in. H ₂ O | | O.D. Inlet | | O.D. Outlet | | | | | | | |
| | | cfm | m³/min | cfm | m³/min | cfm | m³/min | in. | cm | in. | cm | in. | cm | in. | cm | in. | cm |
| EAF68110 | No | 75 | 2.1 | 90 | 2.5 | 105 | 3.0 | 2.0 | 5.1 | 1.8 | 4.6 | 4.8 | 12.2 | 6.1 | 15.5 | 9.0 | 22.9 |
| EAF68111 | Yes | 65 | 1.8 | 75 | 2.1 | 85 | 2.4 | 2.0 | 5.1 | 1.8 | 4.6 | 4.8 | 12.2 | 6.1 | 15.5 | 9.0 | 22.9 |
| EAF68120 | No | 100 | 2.8 | 115 | 3.3 | 130 | 3.7 | 2.0 | 5.1 | 2.0 | 5.1 | 5.8 | 14.7 | 7.1 | 18.0 | 13.4 | 34.0 |
| EAF68130 | Yes | 90 | 2.5 | 105 | 3.0 | 115 | 3.3 | 2.0 | 5.1 | 2.0 | 5.1 | 5.8 | 14.7 | 7.1 | 18.0 | 13.4 | 34.0 |
| EAF68132 | No | 150 | 4.2 | 175 | 5.0 | 195 | 5.5 | 2.5 | 6.4 | 2.5 | 6.4 | 6.9 | 17.5 | 8.2 | 20.8 | 14.1 | 35.8 |
| EAF68133 | Yes | 145 | 4.1 | 165 | 4.7 | 185 | 5.2 | 2.5 | 6.4 | 2.5 | 6.4 | 6.9 | 17.5 | 8.2 | 20.8 | 14.1 | 35.8 |
| EAF68140 | No | 160 | 4.5 | 190 | 5.4 | 210 | 5.9 | 3.0 | 7.6 | 3.0 | 7.6 | 7.2 | 18.3 | 8.6 | 21.8 | 14.6 | 37.1 |
| EAF68150 | Yes | 150 | 4.2 | 170 | 4.8 | 190 | 5.4 | 3.0 | 7.6 | 3.0 | 7.6 | 7.2 | 18.3 | 8.6 | 21.8 | 14.6 | 37.1 |
| EAF68160 | No | 250 | 7.1 | 290 | 8.2 | 325 | 9.2 | 3.8 | 9.7 | 3.5 | 8.9 | 8.4 | 21.3 | 9.7 | 24.6 | 15.6 | 39.6 |
| EAF68170 | Yes | 225 | 6.4 | 260 | 7.4 | 280 | 7.9 | 3.8 | 9.7 | 3.5 | 8.9 | 8.4 | 21.3 | 9.7 | 24.6 | 15.6 | 39.6 |
| EAF68175 | No | 375 | 10.6 | 425 | 12.0 | 475 | 13.5 | 4.5 | 11.4 | 4.0 | 10.2 | 10.6 | 26.9 | 11.9 | 30.2 | 19.1 | 48.5 |
| EAF68175-1 | Yes | 325 | 9.2 | 375 | 10.6 | 425 | 12.0 | 4.5 | 11.4 | 4.0 | 10.2 | 10.6 | 26.9 | 11.9 | 30.2 | 19.1 | 48.5 |
| EAF68178 | No | 600 | 17.0 | 685 | 19.4 | 770 | 21.8 | 6.0 | 15.2 | 5.0 | 12.7 | 12.2 | 31.0 | 13.5 | 34.3 | 22.0 | 55.9 |
| EAF68179 | Yes | 500 | 14.2 | 565 | 16.0 | 630 | 17.8 | 6.0 | 15.2 | 5.0 | 12.7 | 12.2 | 31.0 | 13.5 | 34.3 | 22.0 | 55.9 |
| EAF68182 | No | 800 | 22.7 | 910 | 25.8 | 1060 | 30.0 | 7.0 | 17.8 | 6.0 | 15.2 | 15.5 | 39.4 | 16.8 | 42.7 | 21.5 | 54.6 |
| EAF68185 | Yes | 710 | 20.1 | 830 | 23.5 | 960 | 27.2 | 7.0 | 17.8 | 6.0 | 15.2 | 15.5 | 39.4 | 16.8 | 42.7 | 21.5 | 54.6 |

EAF Series Air Cleaner

Replacement Filter Guide



| Part No. | Primary | Safety |
|------------|-----------|-----------|
| EAF68110 | EAPE68300 | N/A |
| EAF68111 | EAPE68300 | EASE68340 |
| EAF68120 | EAPE68310 | N/A |
| EAF68130 | EAPE68310 | EASE68350 |
| EAF68132 | EAPE68315 | N/A |
| EAF68133 | EAPE68315 | EASE68355 |
| EAF68140 | EAPE68320 | N/A |
| EAF68150 | EAPE68320 | EASE68360 |
| EAF68160 | EAPE68330 | N/A |
| EAF68170 | EAPE68330 | EASE68370 |
| EAF68175 | EAPE68332 | N/A |
| EAF68175-1 | EAPE68332 | EASE68372 |
| EAF68178 | EAPE68630 | N/A |
| EAF68179 | EAPE68630 | EASE68631 |



EA Series Air Filters

Replacement Filters

EA Series Replacement Filters

The most important components of any heavy duty air cleaner are the primary and secondary filter. Without a high quality replacement filter, the air cleaner cannot perform the job it is designed to do. Racor replacement filters for the EA and EAVLR air cleaners are designed and manufactured with the highest quality materials, including high efficiency, high capacity filter media, and reliable, durable urethane end caps.

Features:

- **High Efficiency media**
- **Industry standard radial seal design**
- **Urethane encapsulation**
- **High dust holding capacity**



Product Information and Specifications

Racor introduces a line of replacement air filters for its EA and EAVLR series air cleaners. These primary and safety filters are high efficiency urethane radial seal filters

designed to perform at the highest level to protect your investment. They are also direct replacements for common air cleaner designs from other filter manufacturers.

| Part No. | | Engine | | Donaldson | | Baldwin | | Fleetguard | | Luberfiner | |
|----------|-----------|---------|---------|-----------|---------|---------|--------|------------|---------|------------|----------|
| Primary | Safety | Primary | Safety | Primary | Safety | Primary | Safety | Primary | Safety | Primary | Safety |
| EAP68300 | EASE68340 | 2s-E1 | 2s-E2 | P822686 | P535396 | RS3715 | RS3930 | AF25538 | N/A | LAF8388 | LAF22056 |
| | | 68300 | 68340 | | | | | | | | |
| EAP68310 | EASE68350 | 2-E1 | 2-E2 | P772578 | P775298 | RS3546 | RS3547 | AF25539 | AF25434 | LAF8147 | LAF5844 |
| | | 68310 | 68350 | | | | | | | | |
| EAP68315 | EASE68355 | 2.5-E1 | 2.5-E2 | P822768 | P822769 | RS3702 | RS3703 | AF25436 | AF25497 | LAF8143 | LAF8114 |
| | | 68315 | 68355 | | | | | | | | |
| EAP68320 | EASE68360 | 3-E1 | 3-E2 | P772579 | P775300 | RS3542 | RS3543 | AF25526 | AF25484 | LAF8148 | LAF9332 |
| | | 68320 | 68360 | | | | | | | | |
| EAP68330 | EASE68370 | 3.75-E1 | 3.75-E2 | P772580 | P775302 | RS3544 | RS3545 | AF25352 | AF25485 | LAF4544 | LAF4545 |
| | | 68330 | 68370 | | | | | | | | |
| EAP68332 | EASE68372 | 4.5-E1 | 4.5-E2 | P777588 | P777639 | N/A | RS3885 | AF25504 | AF25491 | N/A | LAF5932 |
| | | 68332 | 68372 | | | | | | | | |
| EAP68630 | EASE68631 | 6-E1 | 6-E2 | N/A | N/A | N/A | N/A | N/A | N/A | N/A | N/A |
| | | 68630 | 68631 | | | | | | | | |

Low-Resistance Flexible Air Inlet Fitting and Clamps

Rubber elbows, adapters and clamps provide positive sealing, minimal airflow restriction and easy servicing.

Flexible air inlet fittings are made of high-quality EPDM rubber, and provide minimum airflow restriction between the air cleaner and engine air inlet. Their flexibility simplifies both installation and service. Stainless steel adjustable clamps assure a positive seal and ease of service. (see bulletin #7609 for more information)



Air Inlet Clamps



Filter Service Indicator



This Service Indicator is a precision Airflow Restriction Gauge designed to take the guesswork out of air cleaner filter replacement. Its operation is simple and foolproof.

As dirt captured by the filter cartridge gradually builds up, the system pressure drop increases and can be seen using the Vacuum Indicator on its easy-to-read scale.

The indicator locks up at the point of maximum restriction so readings can be taken with or without the engine running. When the desired change-out point is reached, the filter cartridge is easily reset by simply pushing the button at the bottom of the unit.

This indicator works equally well on both gasoline and diesel equipment.

Economical – Saving one filter change-out can more than cover the cost of the Service Indicator. It's a small price for a potentially large gain year after year.

Standard Filter Monitor Part Numbers

| Part No. | Range ^C | Description |
|------------------------|--------------------|-----------------------------|
| 400033015 ^A | 8-15 | Direct Mount |
| 400033020 ^A | 8-20 | Direct Mount |
| 400033025 ^A | 8-25 | Direct Mount |
| 014440001 ^A | 8-25 | Direct Mount w/ 90° fitting |
| 072604000 ^B | 4-25 | Remote Mount |
| 076248001 ^A | 8-25 | Dash Mount |

^A Unit standard with a 1/8"-27 NPT straight fitting.

^B Unit standard with a 90° coupling and 10' hose.

^C Measurement in inches of water vacuum.

Filter Monitor/Single Latching Position

| Part No. | Range (In. water vac.) |
|-------------|---|
| 500198020 | 20 |
| 500198025 | 25 |
| Accessories | |
| Part No. | Description |
| 400034000 | 90° fitting (Adapts to straight fitting) |

The CCV outlet is connected to the engine's combustion air inlet via an air intake connector where filtered blow-by gas is recycled through the combustion process. Oil collected in the CCV sump is returned to the crankcase through a hose and a drain check valve.

The Racor marine air filter/silencer removes contaminants introduced into the air from both outside and inside the vessel. Sand, salt, carpet fibers and other contaminants are trapped in the oil-impregnated filter media. Turbo noise is reduced by the unique design of the air filter/silencer housing.

| Marine Air Filter | CCV Model |
|-------------------|-----------|
| AF M408512 | CCV4500 |
| AF M501012 | CCV6000 |
| AF M601212 | CCV8000 |
| AF M701212 | CCV12000 |



Marine Air Filter/Silencers

- Reduces noise up to 10 db
- Can integrate Racor CCV systems
- Corrosion resistant
- Cleanable air filter
- No tools needed for servicing
- Compact design



Marine Air Filter Assembly

In order to determine the correct marine air filter application, you will need to know the marine air filter rating (AFR). You will need to provide the hose connection to turbo. Verify that the marine air filter dimensions will fit into your engine room.

In addition, note the dimensions of the marine air filter outlets and the Racor CCV connector barb outside diameter from the chart in the Marine Air Filter Kit installation Section to ensure the correct installation for your engine. However, the marine air filters typically correspond with the following CCV Models (see chart on right).

4-cycle engines: $AFR = HP \times 2.0$
2-cycle engines: $AFR = HP \times 2.5$

Example

- **DDC 12V92TA DDEC (2-cycle – twin turbo):**
 $826 \text{ hp} \times 2.5 = 1032.5 \text{ AFR}$
(1) AF M501012 per turbo
- $1110 \text{ hp} \times 2.5 = 1387.5 \text{ AFR}$
per turbo = AF M601212
- **CAT 3196 (4-cycle – twin turbo):** $660 \text{ hp} \times 2.0 = 1320.0 \text{ AFR} = (1) \text{ AF M601212}$

Note: If AFR is close to maximum capacity of the marine air filter as listed below, use the next size larger.



| Specification | AF M408512 | AF M501012 | AF M601212 | AF M701212 |
|------------------------------|-----------------------------|-----------------------|-----------------------|---|
| Max. Air Flow* | 800 cfm / 377.6 lps | 1200 cfm / 566.3 lps | 1600 cfm / 755.1 lps | 2000 cfm / 944 lps |
| Outlet Diameter | 4.0 in. (10.2 cm) | 5.0 in. (12.7 cm) | 6.0 in. (15.2 cm) | 7.0 in. (17.8 cm) |
| Filter | AF M8040 | AF M8050 | AF M8060 | AF M8070 |
| Length | 12.5 in. (31.8 cm) | 12.5 in. (31.8 cm) | 12.5 in. (31.8 cm) | 12.5 in. (31.8 cm) |
| Depth | 9.6 in. (24.4 cm) | 11.1 in. (28.2 cm) | 13.5 in. (34.3 cm) | 13.5 in. (34.3 cm) |
| Hose Barb Size | 1.0 in. (2.5 cm) | 1.3 in. (3.3 cm) | 1.3 in. (3.3 cm) | 1.3 in. (3.3 cm) |
| Weight | 4.2 lbs (1.9 kgs) | 5.0 lbs (2.3 kgs) | 8.0 lbs (3.6 kgs) | 8.0 lbs (3.6 kgs) |
| CCV Hose Barb | 1.0 in. (2.5 cm) O.D. | 1.3 in. (3.3 cm) O.D. | 1.3 in. (3.3 cm) O.D. | 1.0 in. (2.5 cm) 1.3 in. (3.3 cm) O.D. |
| Operating Temperature | -40°F +240°F / -40°C +116°C | | | |

*Values given are cubic feet per minute (cfm) and liters per second (l/s).



Racor offers direct replacements for the intake air filter operation of competitive air filters/silencers. Also available is the replacement filter for the vacuum limiter air separator.

The filter media for all replacement filters is an oil-impregnated cotton gauze and is sandwiched between pleated, epoxy-coated aluminum wire-mesh polyurethane sealed surfaces. This product is cleanable and must be oiled before using.



Air Filter Cleaning Kit

To be used for washing and re-oiling Racor cleanable air filters.
Part Number: **AF M82006**

| Part No. | Competitive Part Number | Dimensions (In) (DxHxD) |
|----------|-------------------------|-------------------------|
| AF M8145 | CD170 | 10x8x10 |
| AF M8120 | CD173 | 7.5x5x7.5 |
| AF M8121 | CD174 | 7.5x6x7.5 |
| AF M8122 | CD175 | 7.5x7x7.5 |
| AF M8126 | CD178 | 7.5x10x7.5 |
| AF M8010 | CD180 | 3" Air Separator Filter |
| AF M8146 | CD181 | 10x10x10 |
| AF M8153 | CD183 | 12x12x12 |
| AF M8037 | CD184 | 9x14x6.875 |
| AF M8152 | CD186 | 12x7x12 |
| AF M8026 | CD190 | 7.5x10x5.125 |
| AF M8025 | CD195 | 7.5x8x5.125 |
| AF M8034 | CD196 | 9x9x7 |
| AF M8033 | CD197 | 9x12x6.88 |
| AF M8134 | CD200 | 9x9x9 |
| AF M8133 | CD201 | 9x12x9 |
| AF M8141 | CD202 | 10x6x10 |



ECO-TL Series Air Cleaner

Racor's heavy duty air cleaners are designed and built to meet the demanding requirements for agricultural, construction, turf care, forestry, and mining equipment. The ECO-TL Series is designed for high dust environments with excessive vibration and extreme temperatures. The Racor ECO-TL Series is the cost effective choice for heavy duty applications.

Clean air, that's what Racor air filtration is all about. Because when engines breathe easier they perform better - with more power, more torque and with improved fuel economy. The Racor air filter elements offer a high-efficiency, engineered application-specific media that improves performance as it extends service life. Whatever your application, there's a Racor air filtration system that will help you and your engine breathe easy.


Integrated filter restriction indicator port with optional restriction indicator. Changing your filter is no longer a guess.

Racor's innovative design for filter removal, features a low profile twist locking mechanism, which reduces the clearance required for filter change-outs.

Racor's heavy duty air filter media is over 99.9% efficient at removing contaminants from the air, and is designed to withstand the harsh environments encountered in demanding applications.

Polished stainless steel mounting bracket built to withstand corrosive environments.

Evacuation valve allows accumulated water and dust to drain.

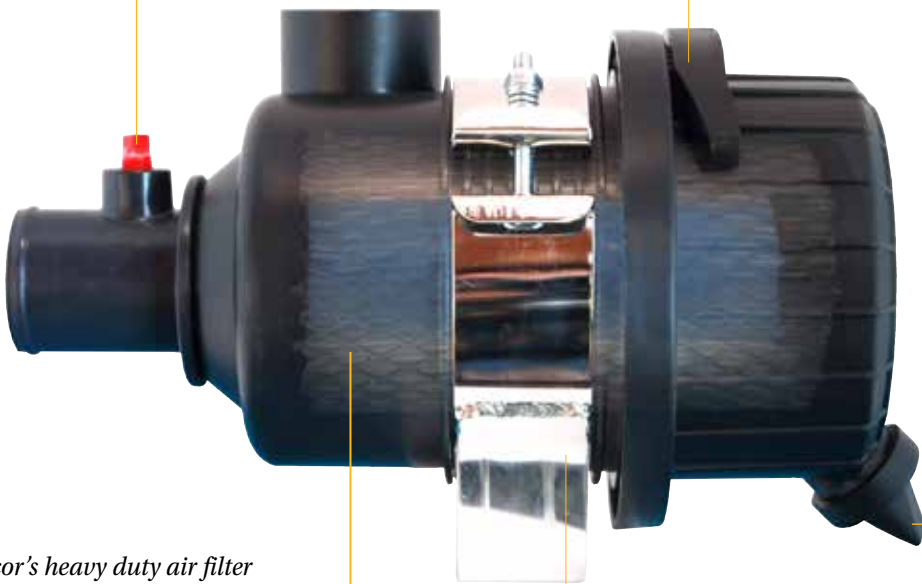

Build a Part No.:

| | Inlet Diameter 20 = 2.0" | Outlet Diameter 18 = 1.75" | Outlet Type 00 - Straight 90 - 90°-elbow | Elements 10-Primary Only 20-Primary & Secondary |
|-----|-----------------------------|-------------------------------|--|---|
| EAF | 20 | 18 | 00 | 10 |

*Available part numbers are listed on page 37.


ECO-TL Accessories:



ECO-TL w/Vacuum Indicator
Part No.: 400033025 Shown



ECO-TL w/Raincap
Part No.: EARC2000 Shown

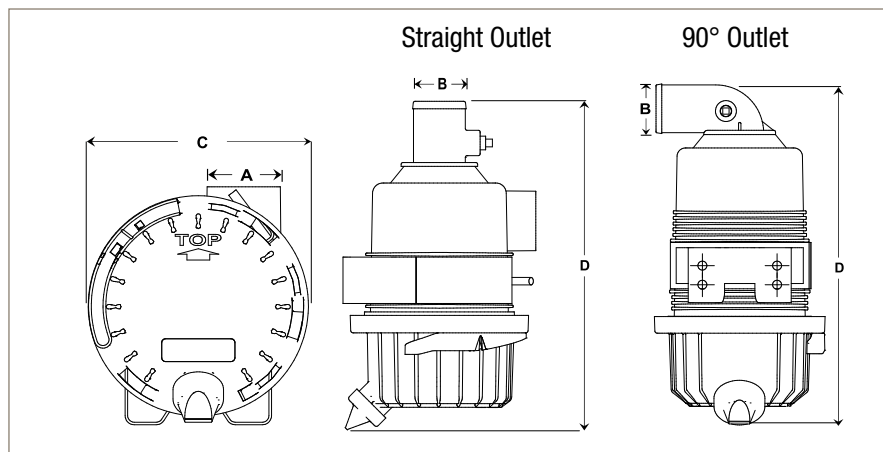

| | | Flow Rate at Initial Restriction | | | | | | A | | B | | C | | D | |
|----------------------|---|----------------------------------|--------|---------------------|--------|----------------------|-----------------------|----------|------|-----------|------|------|-----|-------|-------|
| | | 6" H ₂ O | | 8" H ₂ O | | 10" H ₂ O | | OD Inlet | | OD Outlet | | | | | |
| Part Numbers | | CFM | m3/min | CFM | m3/min | CFM | m3/min | inch | mm | inch | mm | inch | mm | inch | mm |
| EAF20180010 | 2" x 1.75" Straight Outlet | 75 | 2.1 | 90 | 2.5 | 105 | 3 | 2 | 51 | 1.75 | 45 | 6.14 | 156 | 8.98 | 228 |
| EAF20180020 | 2" x 1.75" Straight Outlet (with safety element) | 65 | 1.8 | 75 | 2.1 | 85 | 2.4 | 2 | 51 | 1.75 | 45 | 6.14 | 156 | 8.98 | 228 |
| EAF20189010 | 2" x 1.75" 90° Outlet | 66 | 1.87 | 81 | 2.29 | 93 | 2.63 | 2 | 51 | 1.75 | 45 | 6.14 | 156 | 9.9 | 251.5 |
| EAF20189020 | 2" x 1.75" 90° Outlet (with safety element) | 57 | 1.61 | 69 | 1.95 | 78 | 2.21 | 2 | 51 | 1.75 | 45 | 6.14 | 156 | 9.9 | 251.5 |
| Replacement Elements | Primary: EAPE68300P | | | | | | Secondary: EASE68340P | | | | | | | | |
| EAF20200010 | 2" x 2" Straight Outlet | 100 | 2.8 | 115 | 3.3 | 130 | 3.7 | 2 | 51 | 2 | 51 | 7.09 | 180 | 13.39 | 340 |
| EAF20200020 | 2" x 2" Straight Outlet (with safety element) | 90 | 2.5 | 105 | 3 | 115 | 3.3 | 2 | 51 | 2 | 51 | 7.09 | 180 | 13.39 | 340 |
| EAF20209010 | 2" x 2" 90° Outlet | 88 | 2.5 | 104 | 2.95 | 115 | 3.26 | 2 | 51 | 2 | 51 | 7.09 | 180 | 14.39 | 365.5 |
| EAF20209020 | 2" x 2" 90° Outlet (with safety element) | 78 | 2.2 | 97 | 2.75 | 105 | 2.98 | 2 | 51 | 2 | 51 | 7.09 | 180 | 14.39 | 365.5 |
| Replacement Elements | Primary: EAPE67310P | | | | | | Secondary: EASE67350P | | | | | | | | |
| EAF25250010 | 2.5" x 2.5" Straight Outlet | 150 | 4.2 | 175 | 5 | 195 | 5.5 | 2.5 | 63.5 | 2.5 | 63.5 | 8.15 | 207 | 14.13 | 359 |
| EAF25250020 | 2.5" x 2.5" Straight Outlet (with safety element) | 145 | 4.1 | 165 | 4.7 | 185 | 5.2 | 2.5 | 63.5 | 2.5 | 63.5 | 8.15 | 207 | 14.13 | 359 |
| EAF25259010 | 2.5" x 2.5" 90° Outlet | 138 | 3.9 | 157 | 4.45 | 176 | 4.98 | 2.5 | 63.5 | 2.5 | 63.5 | 8.15 | 207 | 15.13 | 384.3 |
| EAF25259020 | 2.5" x 2.5" 90° Outlet (with safety element) | 127 | 3.6 | 150 | 4.25 | 168 | 4.76 | 2.5 | 63.5 | 2.5 | 63.5 | 8.15 | 207 | 15.13 | 384.3 |
| Replacement Elements | Primary: EAPE68315P | | | | | | Secondary: EASE68355P | | | | | | | | |

Raincaps



Part No.:
EARC2500

Part No.:
EARC2000

| Part No. | Air Inlet ID | | Dimensions | | | |
|----------|--------------|-----|------------|------|--------|-----|
| | | | Width | | Height | |
| | in. | cm | in. | cm | in. | cm |
| EARC2000 | 2.0 | 5.1 | 5.1 | 13.0 | 3.0 | 7.6 |
| EARC2500 | 2.5 | 6.4 | 6.1 | 15.5 | 3.0 | 7.6 |

Fuel Dispensing Filtration

Filtration and water separation is critical to efficient diesel, gasoline, and alternative fuel engine operation. Racor Division has become the leader in filtration technology, partnering with engine manufacturers to design and produce innovative systems.

Brochure number #RSL0020.



Filtration Pumps

Racor has raised the bar for fuel filtration systems by offering an extensive line of fuel filters with integrated fuel priming pumps. These assemblies feature all of the protection of a standard Racor filter with the added value and convenience of a fuel pump.

Brochure numbers #7683.



Air Filter/Silencers & Crankcase Ventilation Filtration Systems

Racor Air Filter/Silencers and Crankcase Ventilation Filtration Systems help to keep marine engines and engine rooms contaminant and vapor free. The patented CCVTM contains Racor's high-performance VaporblocTM filter made with depth-loading, engineered fiber-coalescing media. The marine air filter/silencer contains a washable media and is designed to connect easily to the Racor CCV to complete the system.



AFM


CCVTM

Brochure numbers #7790 and 7501.

Fluid Transfer Systems

Racor fluid transfer systems make remote, on-demand filtering for contaminant-free fluids fast and convenient. Racor fluid transfer systems can be used to prefilter fluids, transfer fluids or to clean existing systems.

Brochure number #RSL0020.

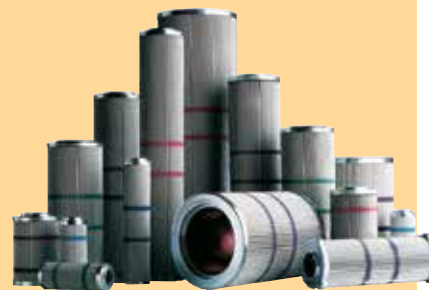

ParFitTM Hydraulic Elements

The competitively priced ParFitTM hydraulic elements are interchangeable with OEM and aftermarket elements to allow users to acquire all their replacement elements from one quality source.

Brochure number #7729.

Bypass Oil Filtration Systems

Removes dirt, varnish, ash, tar, soot and other contaminants along with condensed water which forms damaging acids if left in the oil.



Bypass Oil
Absolute Series

Brochure number #7815.

Parker Filtration's Products and Systems



AEROSPACE

Key Products

- Filter Vessels (API/IP)
- Fluid Conditioning Monitors (Fuel & Hydraulic)
- Fuel Filter/Water Separators
- Fuel Inerting Systems (OBIGGS)
- Fuel Loading Filters (API/IP)
- Fuel, Hydraulic, & Lubrication Filters
- Nitrogen Tire Inflation Systems



FOOD & BEVERAGE

Key Products

- Carbon Dioxide Purifiers
- Compressed Air Dryers
- Fiber & Membrane Filters
- Nitrogen Generators
- Stainless Steel Filter Housings
- Steam & Sterile Air Filters
- Validation Test Equipment
- Water Chillers
- Water Filters



INDUSTRIAL & PLANT EQUIPMENT

Key Products

- ASME Coded Vessels
- Compressed Air Filters
- Condensate Management
- Contamination Monitoring
- Desiccant Dryers
- Membrane Filters & Dryers
- Refrigerated Dryers
- Hydraulic Filters
- Oil/Water Separators
- Process Filters
- Portable Hydraulic Systems



LIFE SCIENCES

Key Products

- Breathing Air Filters & Systems
- Chillers
- Compressed Air Filters
- Filter Integrity Analyzers
- Gas Sterilization Filters
- High Purity Gas Filters
- Hydrogen Gas Generators
- Nitrogen TriGas Systems
- Sterile Water Filters
- Syringe Filters



MARINE

Key Products

- Air Intake Filters
- ASME High Flow Vessels
- Crankcase Emission Filter Systems
- Fuel Dispensing Filters
- Engine Fuel Filter/Water Separators
- Engine Oil & Coolant Filters
- Gasoline Filters
- Hydraulic Filters
- Hydrocarbon Fluid Filters
- Oil/Water Separators
- Submarine CO₂ Reduction Units
- Water Desalination & Purification Systems



OIL & GAS

Key Products

- Air Intake Filters
- ASME High Flow Vessels
- Compressed Air Filters & Dryers
- Compressed Air Water Separators
- Crankcase Emission Filter Systems
- Engine Fuel Filter/Water Separators
- Engine Oil & Coolant Filters
- Fluid Condition Monitoring Systems
- Fuel Dispensing Filters
- Hydraulic Filters
- Hydrocarbon Fluid Filters
- Integrity Test Equipment
- Nitrogen Generators
- Mechanical Separators
- Membrane & Sterile Air Filters
- Oil/Water Separators



POWER GENERATION

Key Products

- Air Intake Filters
- ASME High Flow Vessels
- Bioenergy Water Chillers
- Crankcase Emission Filter Systems
- Engine Fuel Filter/Water Separators
- Fluid Condition Monitoring Systems
- Fuel Dispensing Filters
- Load Tap Filters
- Hydrogen Generators
- Magnetic Prefilters
- Nitrogen Generators
- Portable Hydraulic Systems
- Water Sensors



PROCESS

Key Products

- Alternative Gas Dryers & Absorbers
- Bag Filters
- Compressed Air Dryers
- Instrumentation Filters
- Nitrogen Generators
- Oil Absorption Filters
- Pleated Filter Cartridges
- Process Filters
- Semiconductor Filter Cartridges
- Stainless Steel Prefiltration Vessels
- Zero Air Generators



TRANSPORTATION & MOBILE EQUIPMENT

Key Products

- Air Intake Filters
- Alternative Fuel Filters
- ASME High Flow Vessels
- Crankcase Emission Systems
- Fuel Delivery Systems
- Fuel Dispensing Filters
- Fuel Filter/Water Separators
- Multi-stage Filter Systems
- High Pressure Natural Gas Filters
- Nitrogen Tire Inflation Systems
- Suction & Return Line Hydraulic Filters
- Transmission Filters
- Truck & Railway Dryers



WATER

Key Products

- Desalination & Purification Systems
- Oil Absorption Filters
- Oil/Water Separators
- Pleated Filter Cartridges
- Stainless Steel Prefiltration Vessels
- Sterile Water Filters



ENGINEERING YOUR SUCCESS.

Worldwide Filtration Manufacturing Locations

North America

Compressed Air Treatment Filtration & Separation/Balston

Haverhill, MA
978 858 0505
www.parker.com/balston

Finite Airtek Filtration Airtek/donnick hunter/Zander

Lancaster, NY
716 686 6400
www.parker.com/faf

Finite Airtek Filtration/Finite

Oxford, MI
248 628 6400
www.parker.com/finitefilter

Engine Filtration & Water Purification Racor

Modesto, CA
209 521 7860
www.parker.com/racor

Holly Springs, MS
662 252 2656
www.parker.com/racor

Racor – Village Marine Tec.

Gardena, CA
310 516 9911
desalination.parker.com

Parker Sea Recovery

Carson, CA
310 637 3400
www.searecovery.com

Hydraulic Filtration Hydraulic Filter

Metamora, OH
419 644 4311
www.parker.com/hydraulicfilter

Laval, QC Canada
450 629 9594
www.parkerfarr.com

Process Filtration domnick hunter Process Filtration

Oxnard, CA
805 604 3400
www.parker.com/processfiltration

Madison, WI
608 824 0500
www.scilog.com

Phoenixville, PA
610 933 1600
www.parker.com/processfiltration

Aerospace Filtration

Velcon Filtration
Colorado Springs, CO
719 531 5855
www.velcon.com

Europe

Compressed Air Treatment domnick hunter Filtration & Separation

Gateshead, England
+44 (0) 191 402 9000
www.parker.com/dhfn

Parker Gas Separations

Etten-Leur, Netherlands
+31 76 508 5300
www.parker.com/dhfn

Hiross Zander

Padova Business Unit
Padova, Italy
+39 049 9712 111
www.parker.com/hz

Hiross Zander

Essen Business Unit
Essen, Germany
+49 2054 9340
www.parker.com/hz

Engine Filtration & Water Purification Racor

Dewsbury, England
+44 (0) 1924 487 000
www.parker.com/rfde

Racor Research & Development

Stuttgart, Germany
+49 (0)711 7071 290-10
www.parker.com/rfde

Hydraulic Filtration

Hydraulic Filter
Arnhem, Holland
+31 26 3760376
www.parker.com/hfde

Ujala Operation

Ujala, Finland
+358 20 753 2500
www.parker.com/hfde

Condition Monitoring Centre

Norfolk, England
+44 (0) 1842 763 299
www.parker.com/hfde

Parker Kittiwake

West Sussex, England
+44 (0) 1903 731 470
www.kittiwake.com

Parker Procal

Peterborough, England
+44 (0) 1733 232 495
www.kittiwake.com

Process Filtration

domnick hunter Process Filtration
Birtley, England
+44 (0) 191 410 5121
www.parker.com/processfiltration

Parker Twin Filter BV

Zaandam, Netherlands
+31(0)75 655 50 00
www.twinfilter.com

Asia Pacific

Australia

Castle Hill, Australia
+61 2 9634 7777
www.parker.com/australia

China

Shanghai, China
+86 21 5031 2525
www.parker.com/china

India

Navi Mumbai, India
+91 22 651 370 8185
www.parker.com/india

Parker Fowler

Bangalore, India
+91 80 2783 6794
www.johnfowlerindia.com

Japan

Tokyo, Japan
+81 45 870 1522
www.parker.com/japan

Parker Techno

Osaka, Japan
+81 66 340 1600
www.techno.taiyo-ltd.co.jp

Korea

Hwaseon-City
+82 31 359 0852
www.parker.com/korea

Singapore

Jurong Town, Singapore
+65 6887 6300
www.parker.com/singapore

Thailand

Bangkok, Thailand
+66 2186 7000
www.parker.com/thailand

Latin America

Parker Comercio Ltda. Filtration Division

Sao Paulo, Brazil
+55 12 4009 3500
www.parker.com/br

Pan American Division

Miami, FL
305 470 8800
www.parker.com/panam

Africa

Aeroporto Kempton Park, South Africa
+27 11 9610700
www.parker.com/africa

© 2015 Parker Hannifin Corporation. Product names are trademarks or registered trademarks of their respective companies.

7539Rev G 7/15
11/8/16 edit SDH

WARNING: The products described in this catalog can expose you to chemicals including Diisononyl phthalate, Carbon black, which are known to the State of California to cause cancer. For more information go to www.P65Warnings.ca.gov.

